

Current Rating Voltage: 3 Amps 250V AC (r.m.s)

Insulator Resistance: 5000 Megohms min

Contact Resistance: 20 m ohms max.

Dielectric Withstanding: 1000 V AC

Operating Temperature: - 40° ~ +105° C

Contact Material: Copper Alloy

Standard: Brass

Insulator Material: Polyester, UL 94V-0

Standard: PBT

Finish: Standard: Gold Flash all over







Insulator Material: High Temperature

Polyester, UL 94V-0

Max Processing Temp: 230° C for 60 seconds

Max Processing Temp: 260° C for 10 seconds

Recommended P.C. Board Hole Layout

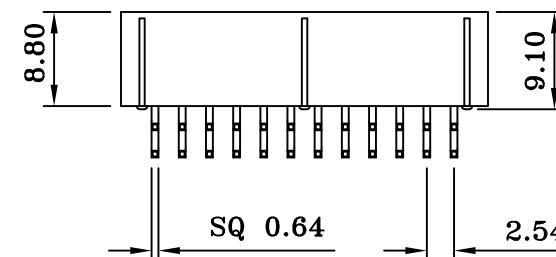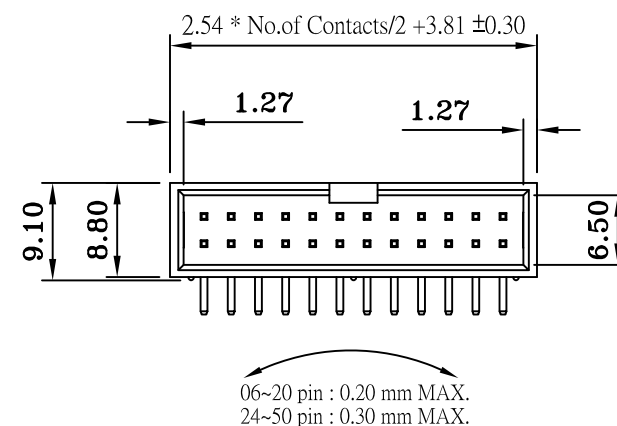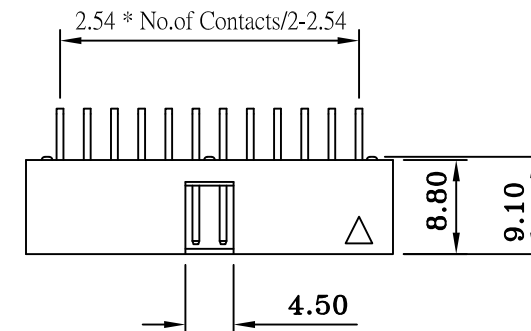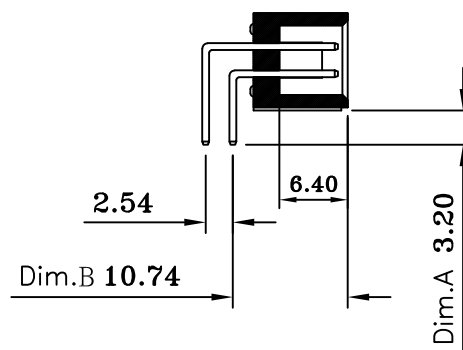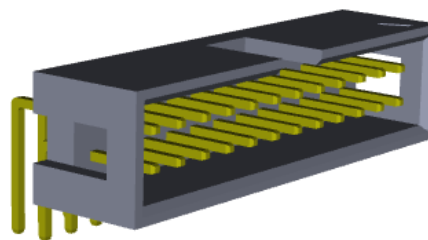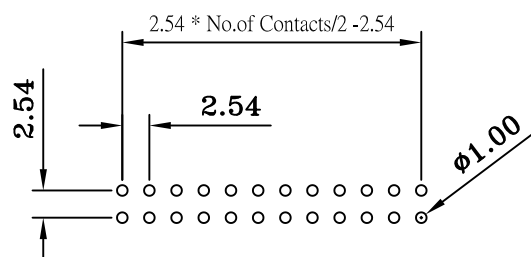

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

PVK-RB-2Xxx-LF

SERIES

LEADFREE

2X03:06 WAY

2X25:50 WAY

BOX

DIP 90°

DESCRIPTION: