


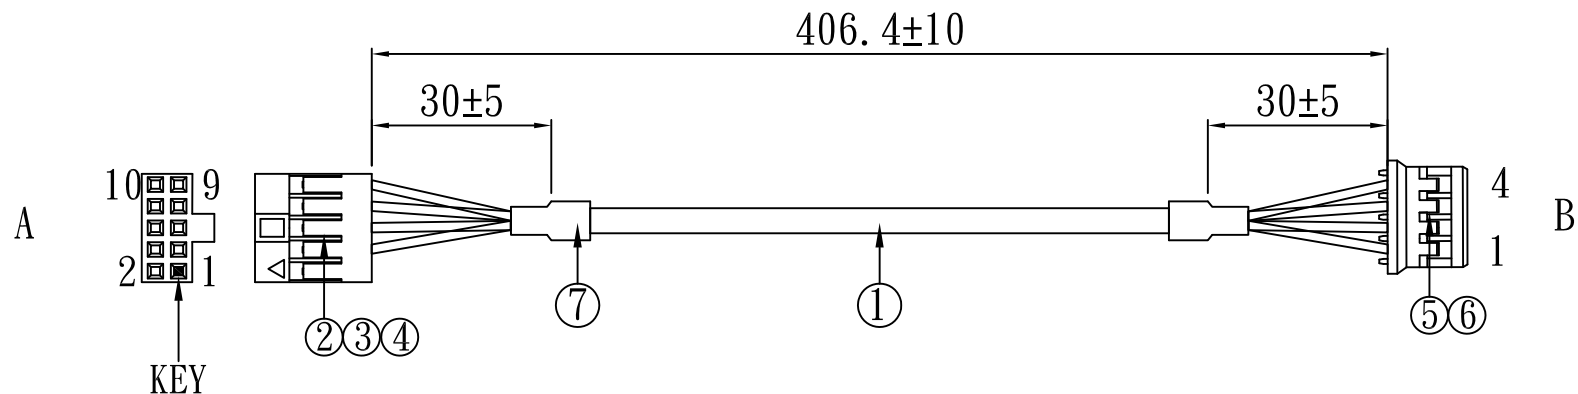

A	COLOR	B
9	RED	1
7	WHITE	2
5	GREEN	3
3	BLACK	4

NOTES:

1. ALL DIMENSIONS ARE "mm".
2. THE PRODUCT MUST BE COMPLY WITH THE DIRECTIVE OF ROHS.

ELECTRICAL TESTING:

1. 100% OPEN/SHORT TEST
2. CONTACT RESISTANCE: 5mΩ
3. INSULATION RESISTANCE: 5MΩ Min

NO.	ITEM.	DESCRIPTION	Q'TY	UL/CSA No.
1	WIRE:	UL2725 #28*1PR(WHITE, GREEN)+#28*2C(RED, BLACK)	1PCS	E238846
		+AEB JACKET:BLACK OD:Ø3.5 USB2.0		
2	HOUSING:	PVK-H-2X05	1PCS	E115256
3	TERMINAL:	PVK-T-22	4PCS	
4	KEY:	PVK-KBK-10	1PCS	E115256
5	HOUSING:	ZHQ-H-04	1PCS	E179987
6	TERMINAL:	ZHQ-T-24	4PCS	
7	SHRINK TUBE:	5Ø*20mm BLACK F32	2PCS	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±








ORDER INFORMATION

PVKZHQ-B050428R1-F16N-LF

SERIES

LEADFREE
406.4mm
FEMALE TO FEMALE
ROUND CABLE
28 AWG
10 TO 04 WAY

DESCRIPTION: CABLE ASS'Y

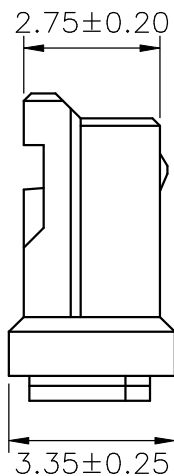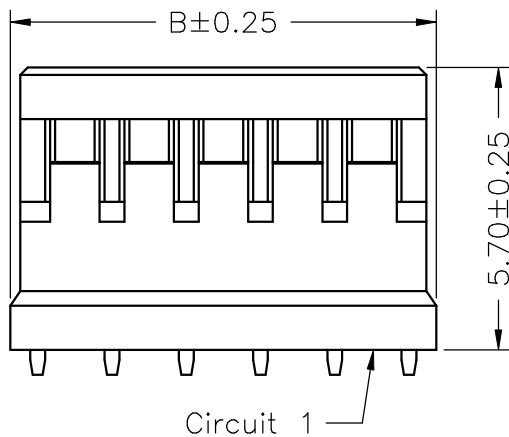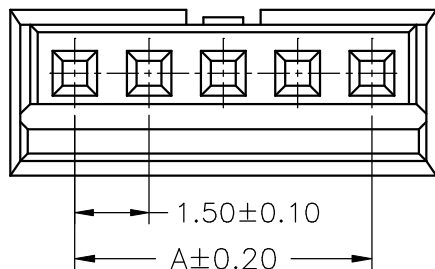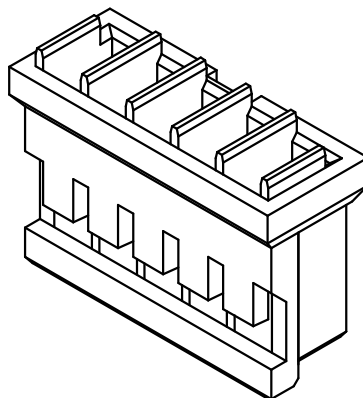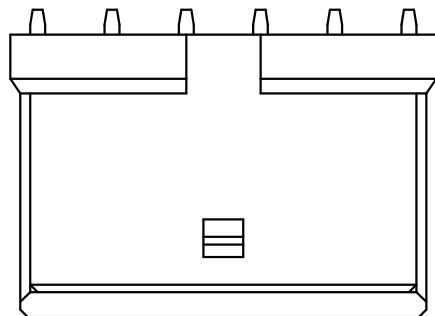

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 350V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: Nylon 66,UL94V-0

Color: Natural(White)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
ZHQ-H-02	1.50	4.10
ZHQ-H-03	3.00	5.60
ZHQ-H-04	4.50	7.10
ZHQ-H-05	6.00	8.60
ZHQ-H-06	7.50	10.10
ZHQ-H-07	9.00	11.60
ZHQ-H-08	10.50	13.10
ZHQ-H-09	12.00	14.60
ZHQ-H-10	13.50	16.10
ZHQ-H-11	15.00	17.60
ZHQ-H-12	16.50	19.10
ZHQ-H-13	18.00	20.60
ZHQ-H-14	19.50	22.10
ZHQ-H-15	21.00	23.60

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION







X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

ZHQ-H-xx-LF
SERIES | LEADFREE
02-15WAY
HOUSING

DESCRIPTION: 1.50mm PITCH HOUSING

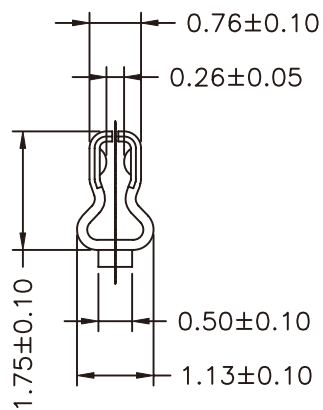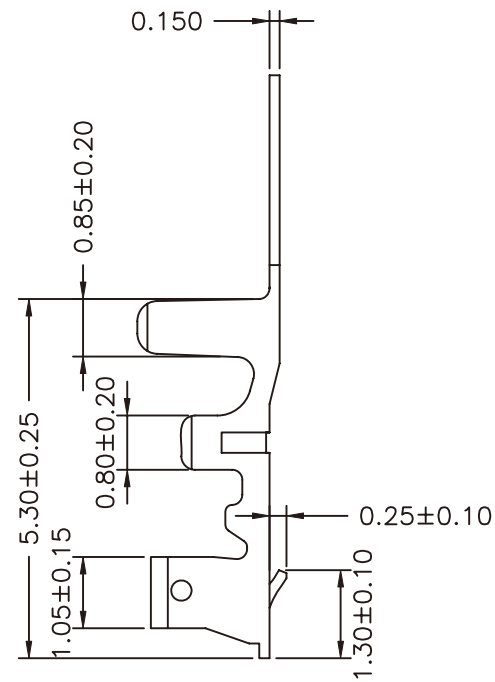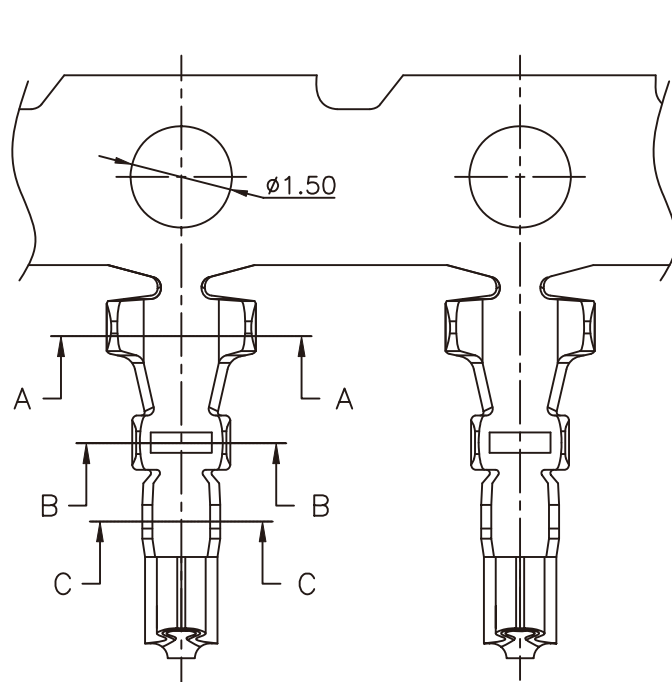


Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
ZHQ-T-24	AWG#24-#28	1.10mm(max)	Phosphor Bronze	Tin-plated	10,000pcs

RoHS Compliant

TOLERANCES ARE

X. ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±



ORDER INFORMATION

ZHQ-T-24-LF
SERIES | LEADFREE
24~28 AWG
TERMINAL

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

PPOJECTION

DESCRIPTION: 1.50mm PITCH CRIMP TERMINAL