


P1

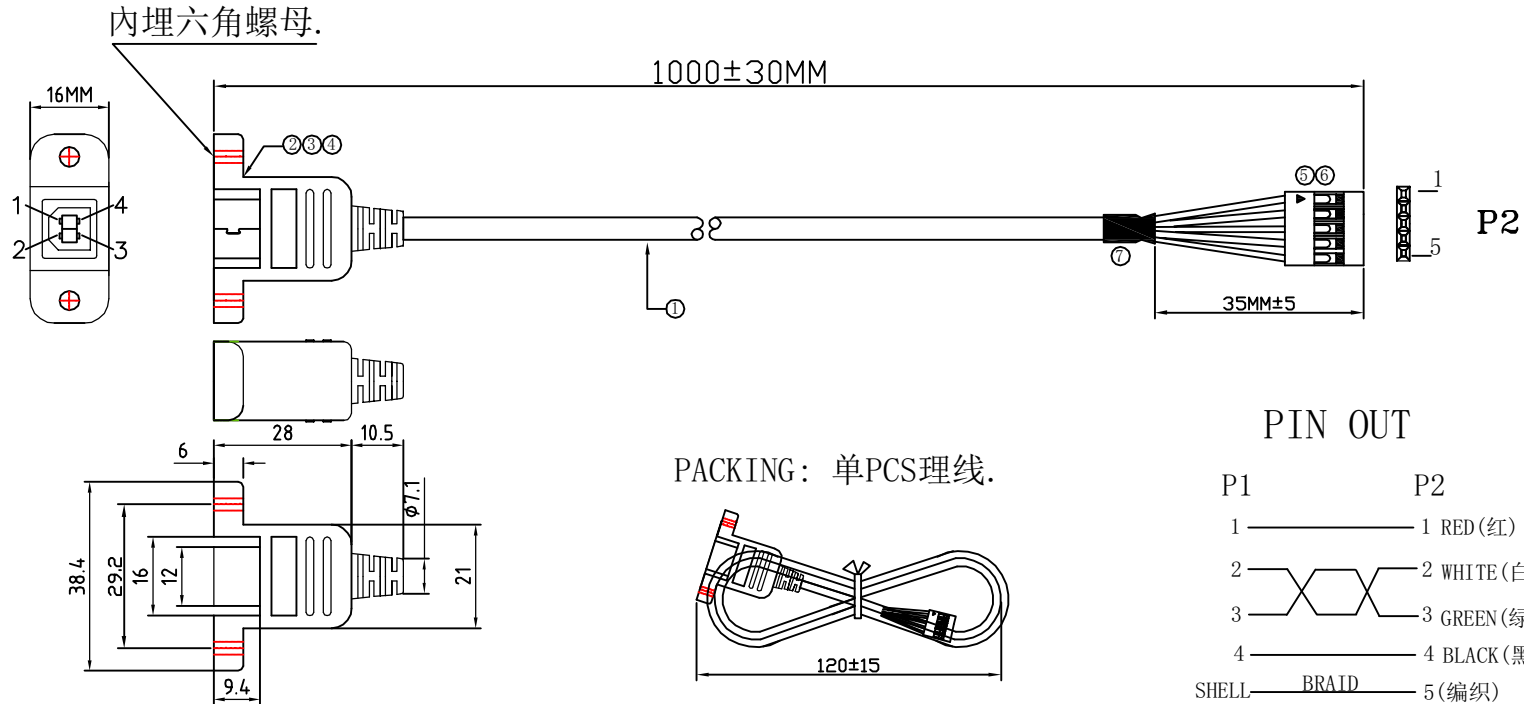

ELECTRONIC TEST:

1. 100% TEST, (Open, Short, Miss Wire).
2. Conduct Resistance: 1Ω/max.
3. Insulation Resistance: 20MΩ/min.
4. Hi-Pot: 300v dc/10ms.

PART LIST: 本产品均符合"ROHS"环保标准, 用的材料均为相当品。

7	黑色套管 ϕ 4.5 L=10MM.	1	PCS
6	TERMINAL: 2.54 端子. PV-TG-22	5	PCS
5	HOUSING: 2.54mm PV-H-1X05	1	SET
4	六角螺母.	2	SET
3	OUTER MOLDED: 45P PVC BLACK.		Kg/1K
2	USB B F 焊线式 白胶芯 铁壳镀镍 PIN针G/F	1	SET
1	USB UL2725 28AWG*1P+24AWG*2C+AB OD: 4.5mm 黑色PVC.		MM
ITEM	STANDARD SPECIFICATION	Q' TY	UNIT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

PVUB-054BPE2428-F1M-LF

SERIES

LEADFREE

1000mm

FEMALE TO FEMALE

24.28 AWG

PANEL EAR

05 WAY TO 4 PIN B TYPE

DESCRIPTION: USB BF帶耳 TO 杜邦2.54 1*5P CABLE BALCK L=1000MM