



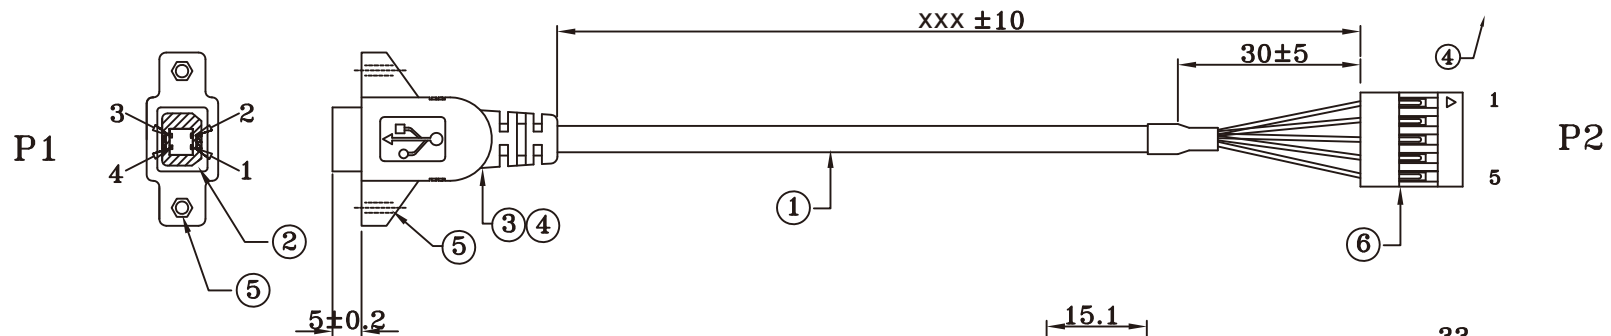

PIN ASSIGNMENT

P1		P2
1— RED		1
2— WHITE		2
3— GREEN		3
4— BLACK		4
SHELL— 地線		5

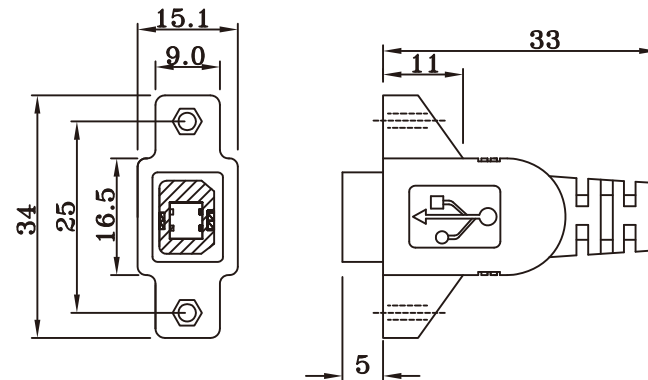

6.	HOUSING: PV-H-1X05 TERMINAL: PV-TG-22
5.	NUTS:(M3)4.75x2.0mm.
4.	30P PVC BLACK
3.	PE MOLDED
2.	USB CONN.: B TYPE, FEMALE, SOLDER TYPE, GOLD-FLASH. INSULATOR: PBT, WHITE. SHELL: NI-PLATED.
1.	CABLE: UL2725 28AWGx1P+24AWGx2C+AEB(AI).OD=ø4.5±0.2mm. PVC JACKET COLOR BEIGE.
NO.	NOTES:

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XX±

DATE

.XXX±

SIZE A4

PPOJECTION

ANG ±

照片框

ORDER INFORMATION

PVUB-054BPE2428-Fxxy-LF

SERIES

LEADFREE

15C:150mm

1M:1000mm

FEMALE TO FEMALE

05 WAY TO 4 PIN B TYPE

24.28 AWG
PANEL EAR

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: