


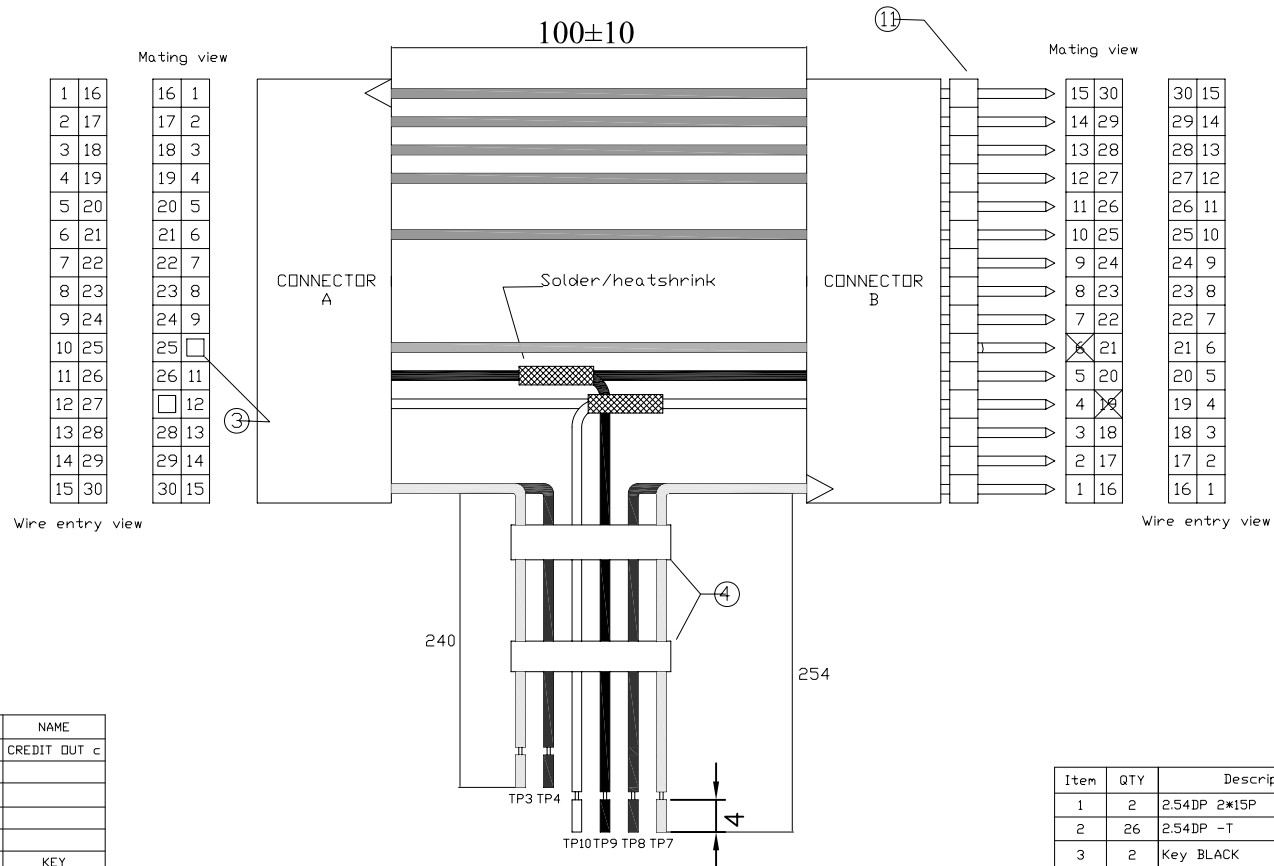

Connector A	Connector B	TP	Color	NAME
	1	7	GREY	CREDIT OUT c
1	15		BROWN	
2	14		BROWN	
3	13		BROWN	
6	10		BROWN	
10			KEY	KEY
12	4	10	WHITE	NEUTRAL
15		3	GREY	CREDIT IN c
17	29		BROWN	
18	28		BROWN	
19	27		BROWN	
21	25		BROWN	
25	21		GREEN	EARTH
26	20	9	BLACK	HDT
27			KEY	KEY
30		4	BLUE	CREDIT IN
	16	8	BLUE	CREDIT OUT

Item	QTY	Description
1	2	2.54DP 2*15P
2	26	2.54DP -T
3	2	Key BLACK
4	4	Nylon tyraps applied around all 6 wires, evenly spaced
5	1	Green, PVC, 80C, 22AWG, Tinned Copper, UL1007, Stranded
6	2	Black, PVC, 80C, 22AWG, Tinned Copper, UL1007, Stranded
7	2	White, PVC, 80C, 22AWG, Tinned Copper, UL1007, Stranded
8	2	Grey, PVC, 80C, 22AWG, Tinned Copper, UL1007, Stranded
9	2	Blue, PVC, 80C, 22AWG, Tinned Copper, UL1007, Stranded
10	8	Brown, PVC, 80C, 22AWG, Tinned Copper, UL1007, Stranded
11	1	2.54 PIN HEADER 2*15P

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PVX2-B15B1522-E4N-LF

SERIES

LEADFREE

100mm

MALE TO FEMALE

22 AWG

30 TO 30 WAY

DESCRIPTION: 2.54 DP 30P/30P+2.54 PIN HEADER L:100mm