






PUSH-IN WIRE CONNECTORS

For use with rigid/solid conductors

- Housing: Polycarbonate (PC)
flame-retardant to UL 94V-0
Working temperature:
T110°C (IEC), 105°C/221°F
- Clamp Unit: Steel plate with copper strip, tin-plated
Stainless spring steel
- Strip Length: 11.0 mm/0.43 in.
- Can be supplied under private label packaging

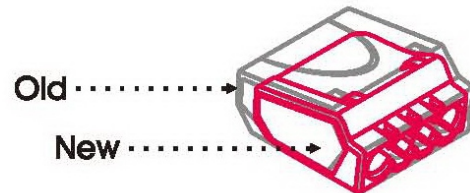

Around 25% space-saving



Model	Poles	Color	Ratings	Packing
PWC-02-RD	2	Red	IEC: 24 A, 450 V 1.0-2.5 mm ² Rigid Single Cord Rigid Multi-Cord	Box of 100
				Ctn of 10,000 (10 bags, 1,000 ea.)
PWC-03-OR	3	Orange	IEC: 24 A, 450 V 1.0-2.5 mm ² Rigid Single Cord Rigid Multi-Cord	Box of 100
				Ctn of 10,000 (10 bags, 10,00 ea.)
PWC-04-YL	4	Yellow	IEC: 24 A, 450 V 1.0-2.5 mm ² Rigid Single Cord Rigid Multi-Cord	Box of 100
				Ctn of 5,000 (10 bags, 500 ea.)
PWC-05-GE	5	Grey	IEC: 24 A, 450 V 1.0-2.5 mm ² Rigid Single Cord Rigid Multi-Cord	Box of 100
				Ctn of 5,000 (10 bags, 500 ea.)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

PWC-xx-xx-LF
SERIES | LEADFREE
COLOR
02~05 WAY

DESCRIPTION: