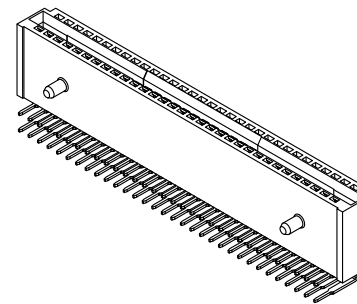
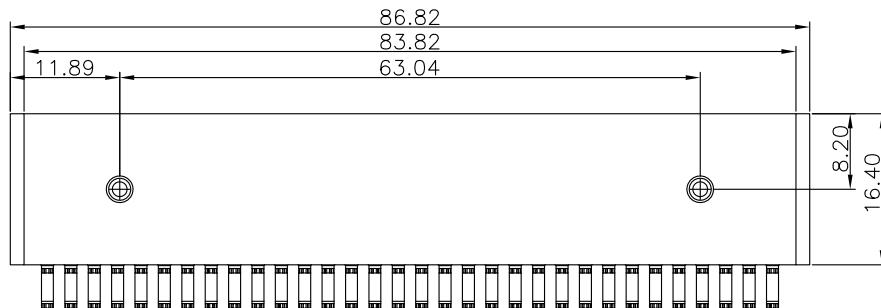
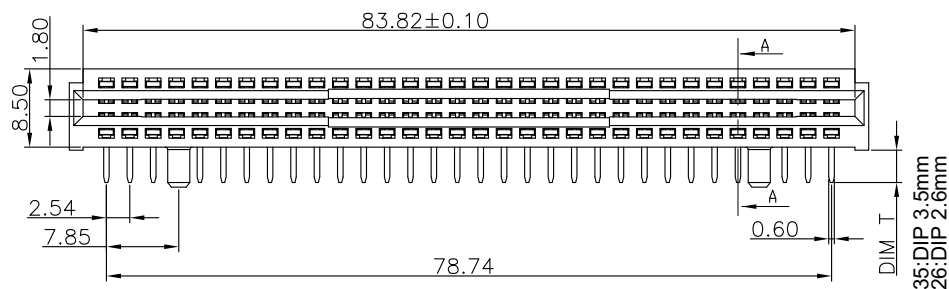
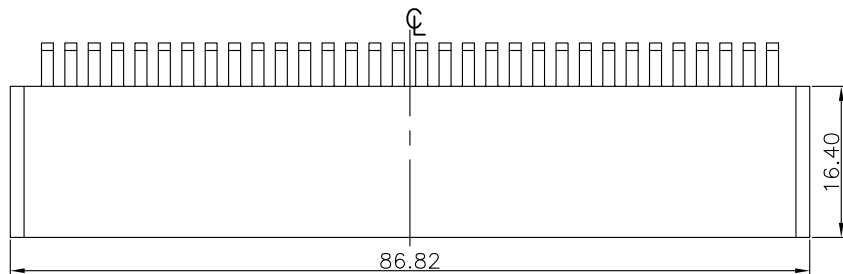


SECTION A-A

Material and Plating:

Housing: LCP, UL94V-0, BLACK.

Power Contacts: High Conductivity Copper .
30u" Au+Pd/Ni on Contact Area and 80u" Min Tin Plated on Solder Tail over nickel 50u" Min .

Electrical Characteristics:

Current Rating: 12.5 A(UL).

Dielectric Withstanding Voltage: DC 1000V For 1 minute.

Insulator Resistance: 5000MΩ min. at DC 500V.

Contact Resistance: 2.5mΩ max. at DC 100mA.

Operating Temperature: -55°C ~+105°C .

***RoHS Compliant**

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PWE-RxxP-064-LF

SERIES LEADFREE

64 WAY


POST

35:DIP 3.5mm


26:DIP 2.6mm

DIP 90°



DESCRIPTION:

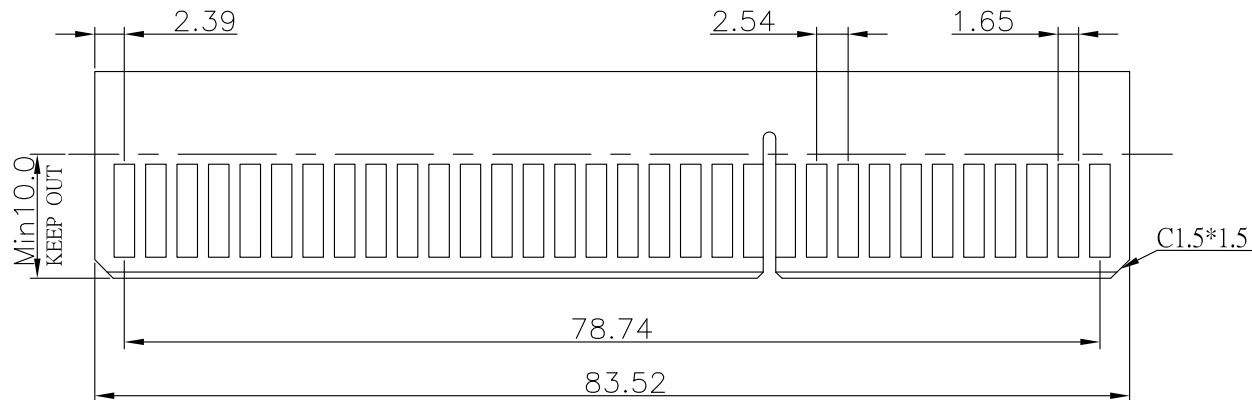

RECOMMENDED MATTING BOARD FOOTPRINT
(Tolerance:±0.05)

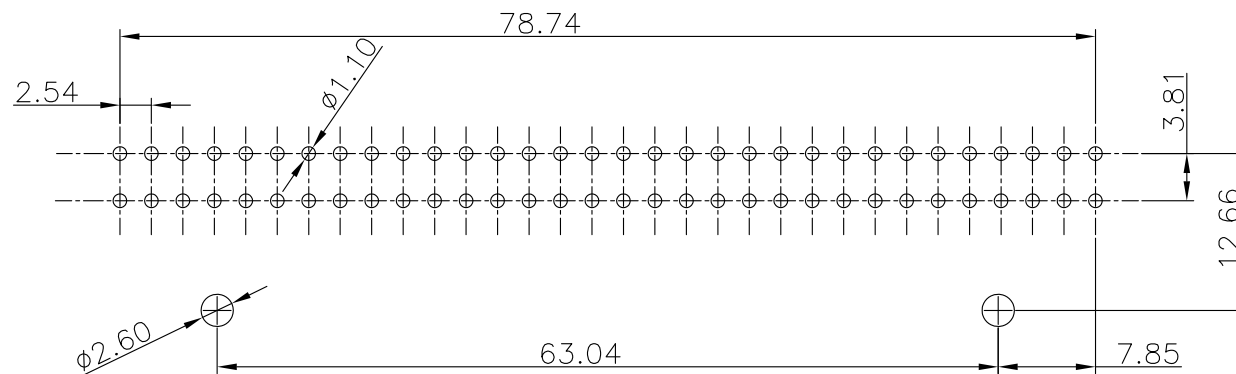

P.C. Board Layout
(Tolerance:±0.05) (Top View)

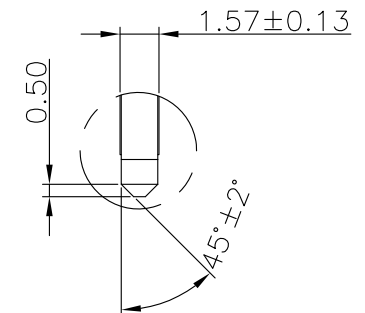

DETAIL:A-A
SCALE :2:1

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PWE-RxxP-064-LF

SERIES LEADFREE

64 WAY

POST

35:DIP 3.5mm

26:DIP 2.6mm

DIP 90°

DESCRIPTION: