


Features:

- Material: UL 94V-2 nylon
- Integrally molded polarization
- Positive locking
- Integrally molded mounting ears available on plug only
- Standard color natural. Can be color coded in black, brown, green, gray, orange, amber, red or yellow
- .264"(6.7mm) grid pattern

Specification:

- Current rating: 9A AC,DC
- Voltage rating: 600V AC,DC
- High Voltage test-withstands 1500 volts
- Storage temperature range: $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$

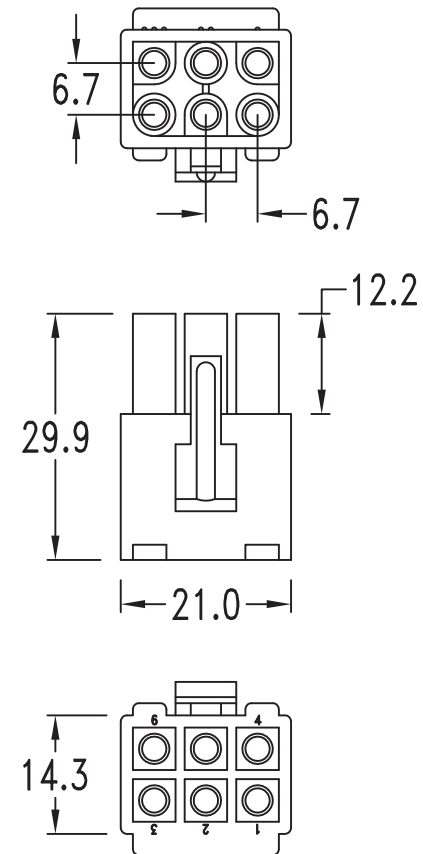

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.40

.XX ± 0.25

.XXX ± 0.08

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

PWL-S-2X03-LF

SERIES LEADFREE
06 WAY
FEMALE HOUSING

DESCRIPTION: .093"(2.36mm) Diameter Connector Housings