

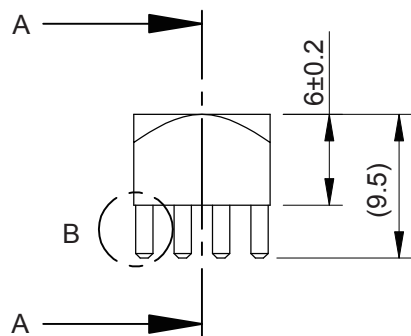
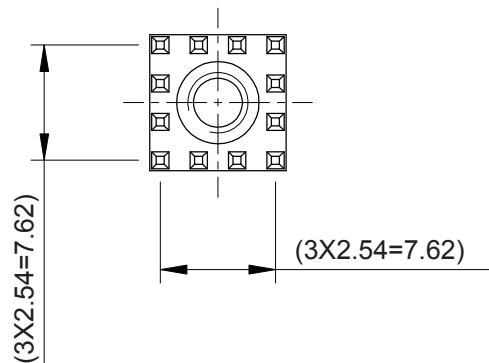


SECTION A-A

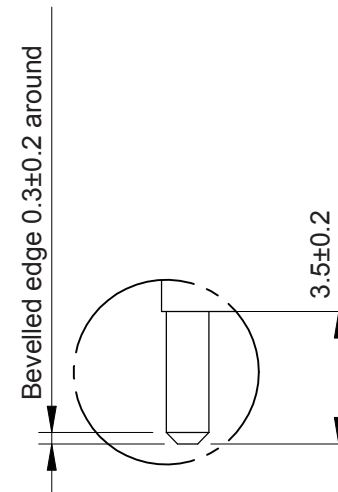

DETAIL B (5:1)



(1:1)

Execution: Press-Fit
Surface coating 5-10um Sn on 2-4um Cu

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

PWM4-FD-4012-LF

SERIES FEMALE 12WAY LEADFREE
4 ROWS
DIP 180°

DESCRIPTION: Bush with threaded hole M4 Pin-Plate Circumferences