


Maximally permissible torque: 3,9Nm
Execution: PRESS FIT
surface coating/Plating: 2-6um Sn over Cu
weight: 10.5gr
Contact points of galvanic shop visibly !
Technical subject to change !

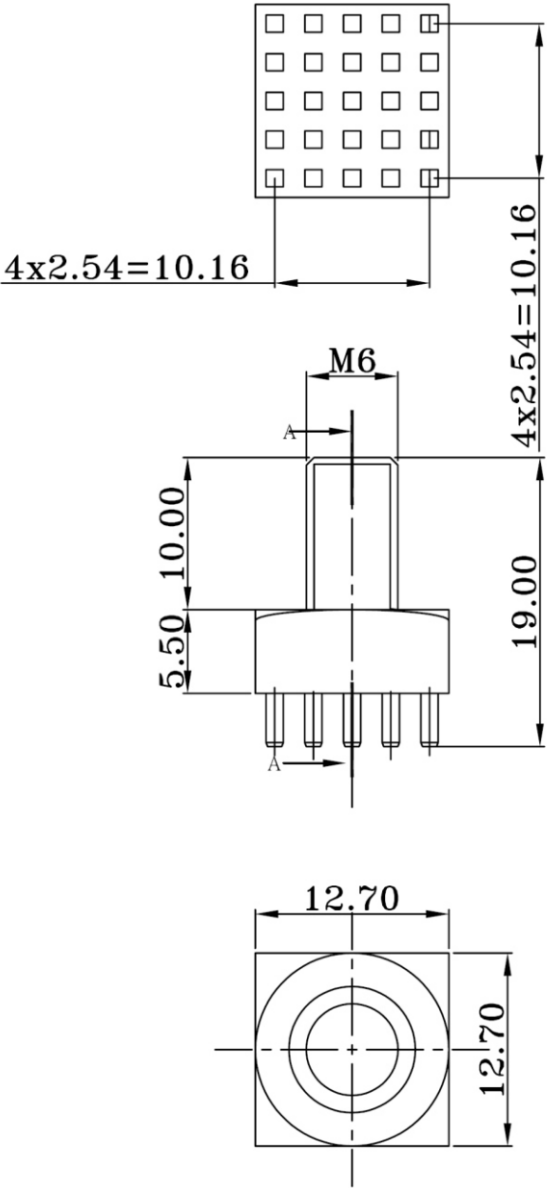

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PWM6-MD-5025-LF

SERIES

LEADFREE

25WAY

5 ROWS

DIP 180°

MALE

DESCRIPTION: