
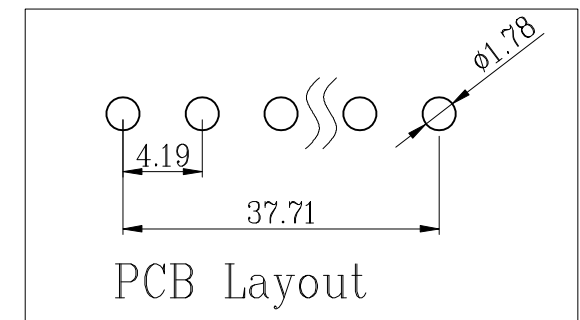
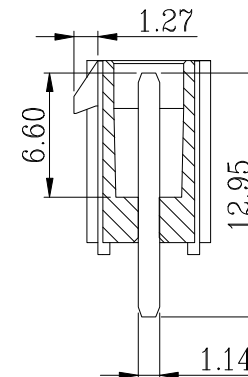
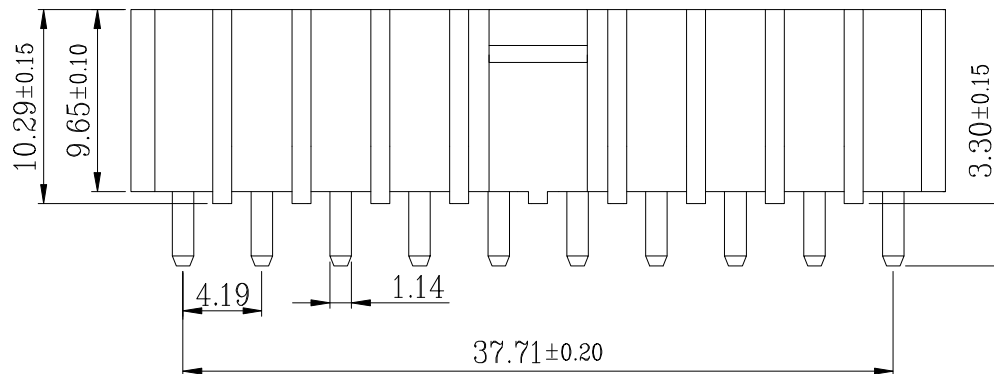


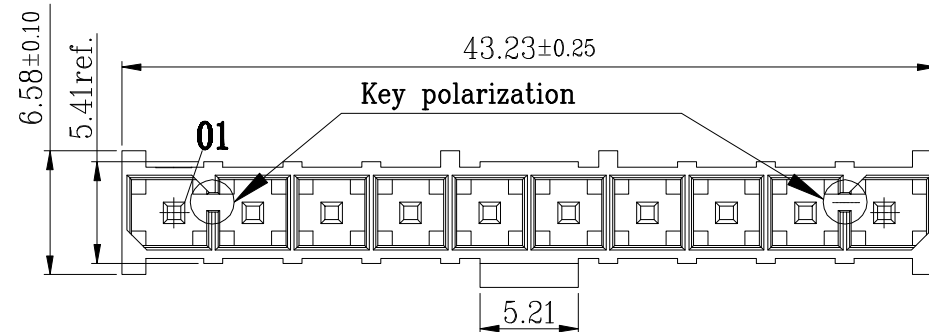

Technical Data :

Insulator Material:	High Temperature Thermoplastic, LCP, UL 94V-0
Contact :	Copper alloy
Plating:	Matte Tin plated over Nickel
Current Rating :	6 Amp
Insulator resistance :	1000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute. DC 707V for 1 Minute.
Operating Temperature:	-55°C to +105°C.
Max. processing Temp:	230°C for 30-60 seconds. 260°C for 10 seconds.
Packing:	without cap in Tube

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.05

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

PWMT-PDXK-1X10-LF

SERIES

KEY

NON POST

DIP 180°

MALE

10 WAY

LEADFREE

DESCRIPTION: