
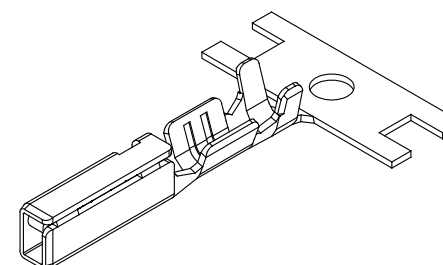

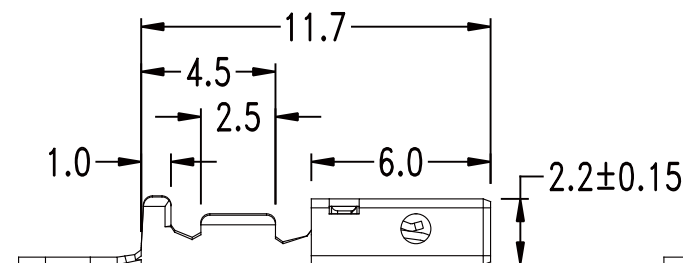

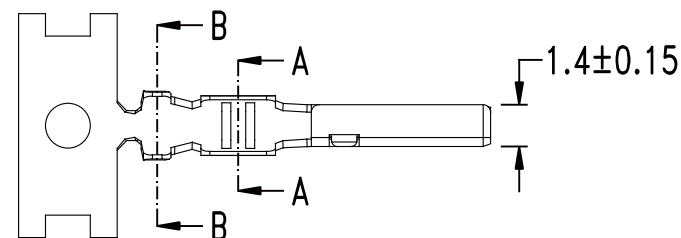


Features:

- Material: Phosphor bronze
- Finished: Tin-plated
- Wire range: #22 ~ #26 AWG
- Insulation O. D.: $\phi 1.35 \sim \phi 1.7\text{mm}$
- Thickness: 0.25mm
- Quantity: 10,000 PCS/Reel

Specification:

- Current rating: 3A AC, DC (#22 AWG)
- Voltage rating: 100V AC, DC
- Contact resistance: Initial value/10m Ω Max.
After environmental testing/20m Ω Max.
- Dielectric withstanding voltage: 1000V AC/minute
- Ambient temperature range: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$
(Including temperature rise)



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

照片框

ORDER INFORMATION

Q02520-FT-22-LF

SERIES

LEADFREE

22~26 AWG

TERMINAL
FEMALE

DESCRIPTION: .079"(2.0mm) Receptacle Contact Terminal