
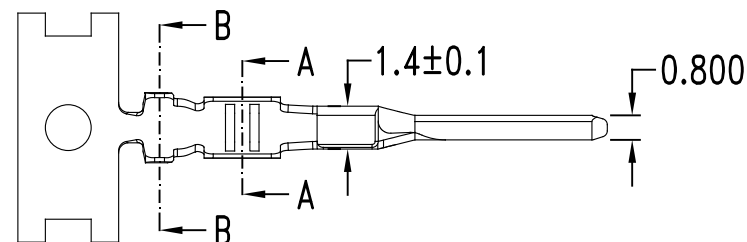





Features:

- Material: Phosphor bronze
- Finished: Tin-plated
- Wire range: UL 1007 #22 ~ #24 AWG
- Thickness: 0.25mm
- Quantity: 10,000 PCS/Reel



Specification:

- Current rating: 3A AC, DC (#22 AWG)
- Voltage rating: 250V AC, DC
- Contact resistance: Initial value/10mΩ Max.
After environmental testing/20mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C
(Including temperature rise)

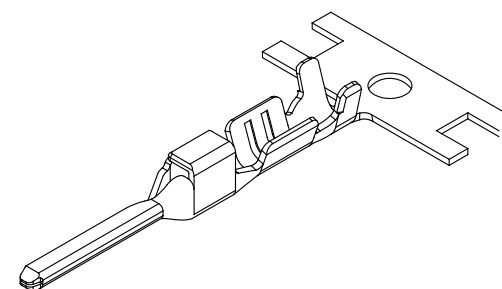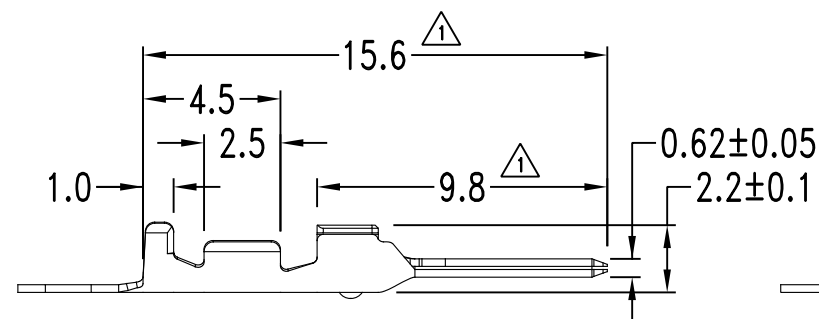

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

Q02520-MT-22-LF

SERIES

LEADFREE

22~24 AWG

TERMINAL

MALE

DESCRIPTION: .079"(2.0mm) Tab Contact Terminal