

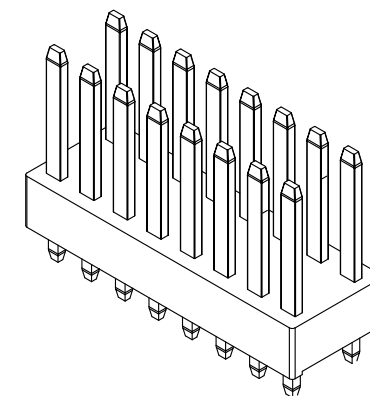
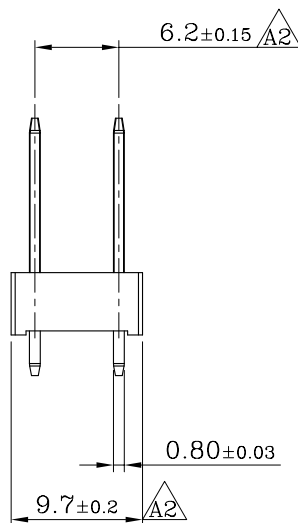


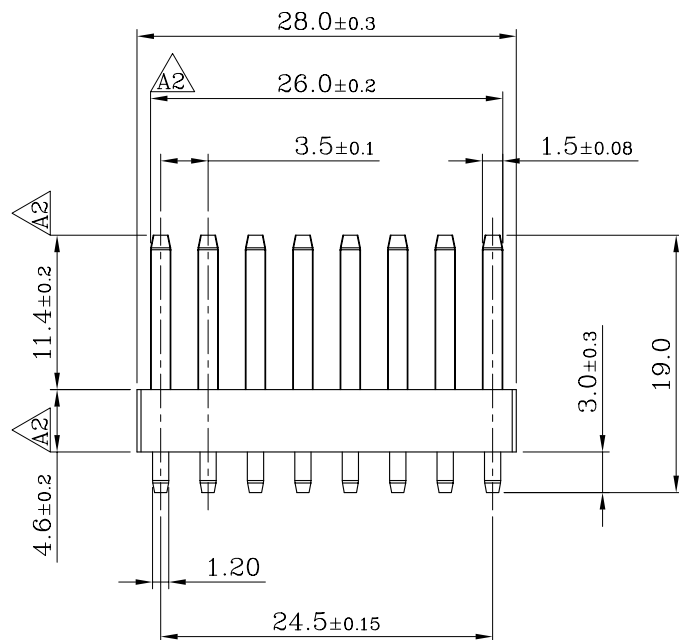

ISOMETRIC VIEW

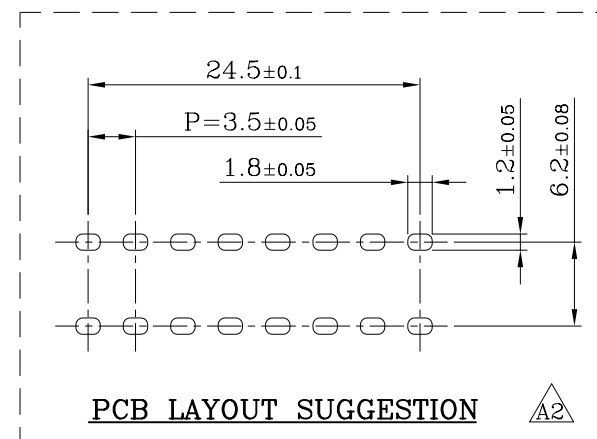

PCB LAYOUT SUGGESTION

NOTES:

1. MATERIAL:

BASE: PA66-GF15 94V-0, LIGHT IVORY COLOR
PIN: BRASS

2. FINISH:

TIN-PLATED, 120u" OVER 50u" NICKEL-PLATED

3. SALT SPRAY TEST MEET: EIA 364-26B

DURATION: 96 HOURS

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.25
.XX ± 0.12
.XXX ± 0.08
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

Q06035-PDX-2X08-LF

SERIES

LEADFREE

16 WAY

NON POST

DIP 180°

MALE

DESCRIPTION: 3.5 PITCH 16P STRAIGHT PIN-HEADER (TAB 1.50)