

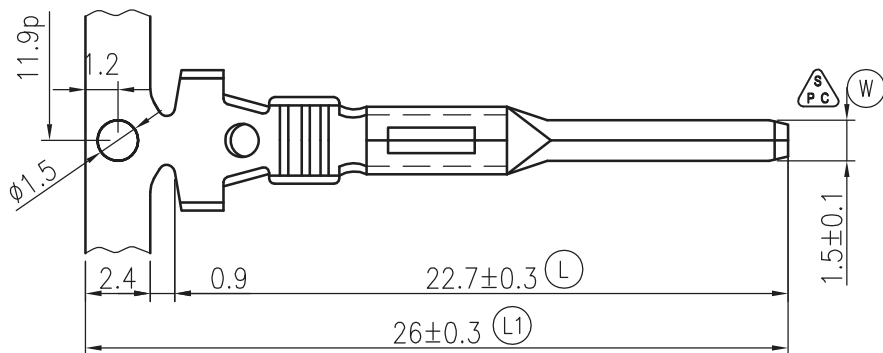




SEC A-A



SEC B-B

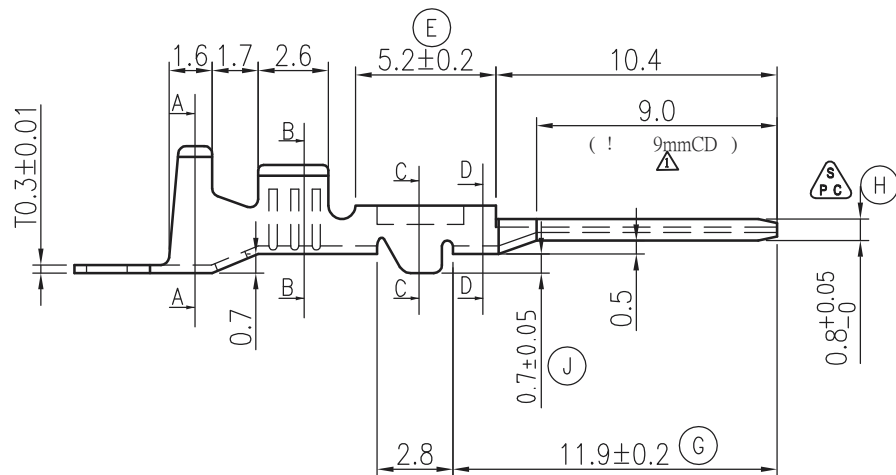

SEC C-C



SEC D-D

說明:

1. 適用線線徑: 0.85~1.25MM²
- △ 2. 鍍金膜厚 3u" 以上
3. 表面處理:
預鍍錫, 膜厚 40u" 以上

NOTE:

1. WIRE RANGE(MM)²: 0.85 1.25MM²
- △ 2. GOLD PLATING THICKNESS
MORE THAN 3u"
3. SURFACE TREATMENT
PRE-TIN PLATED THICKNESS
MORE THAN 40u"

2	Brass	Note 2	0.85-1.25MM ²
1	Brass	Note 1	0.85-1.25MM ²
NO.	Material	SurfaceTreatment	WireRange

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

<1.0 : 0.10
1.0~5.0 : 0.15
5.0~10.0 : 0.20
10.0~20.0 : 0.25
20.0~45.0 : 0.30
>45.0 : 0.50
ANGLE : 2.0

照片框

ORDER INFORMATION

Q06060-MT-16-LF

SERIES T T LEADFREE
16 AWG
TERMINAL
MALE

DESCRIPTION: 060TYPE SERIES WATERPROOF MALE TERMINAL