

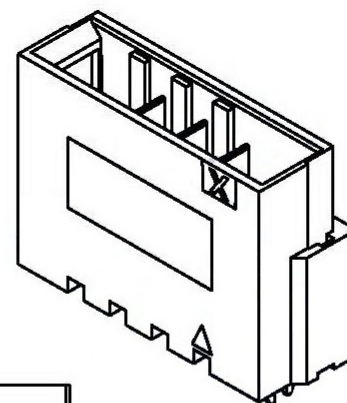
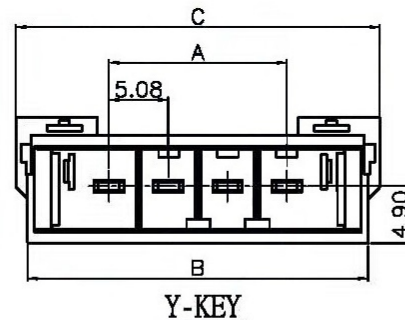
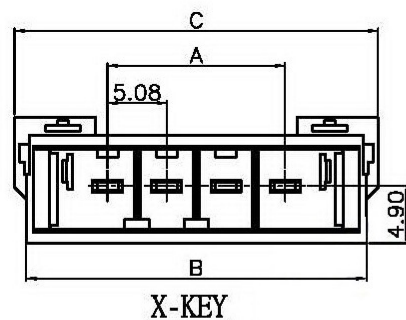
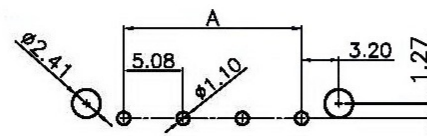
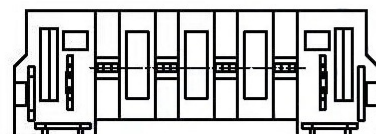
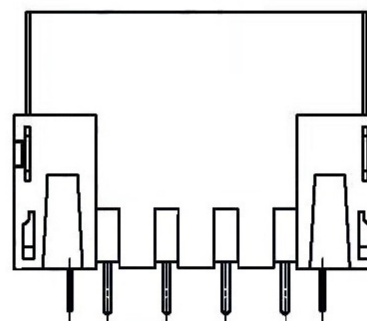


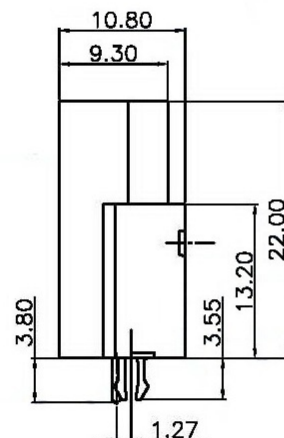

NOTE :

- * Material : Nylon UL 94V-0
- * Standard Color : Black
- * Contact : Brass
- * Finish : Plating Gold flash over Nickel
- * Electrical rating : 600V 8A AC/DC
- * 2-10 circuits available

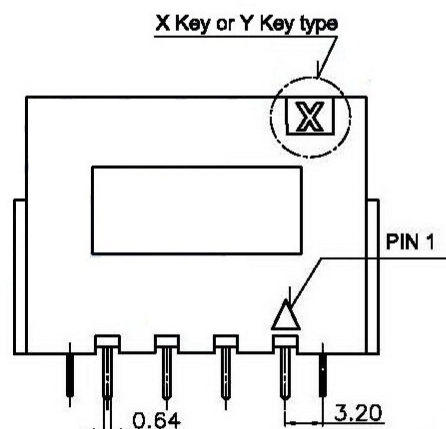

KEYING LOCATION	KEYING	NO.	DIM. A	DIM. B	DIM. C
	X	02	5.08	19.02	21.02
		03	10.16	24.10	26.10
		04	15.24	29.18	31.18
		05	20.32	34.26	36.26
		06	25.40	39.34	41.34
		07	30.48	44.42	46.42
		08	35.56	49.50	51.50
		09	40.64	54.58	56.58
		10	45.72	59.66	61.66
	Y	02	5.08	19.02	21.02
		03	10.16	24.10	26.10
		04	15.24	29.18	31.18
		05	20.32	34.26	36.26
		06	25.40	39.34	41.34
		07	30.48	44.42	46.42
		08	35.56	49.50	51.50
		09	40.64	54.58	56.58
		10	45.72	59.66	61.66

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 2°

照片框

ORDER INFORMATION

Q09051-PDZKx-1Xxx-LF

SERIES

MALE
DIP 180°

LEADFREE
1X02:02 WAY
1X10:10 WAY
X:X KEY
Y:Y KEY
CLIP BLACK

DESCRIPTION: