
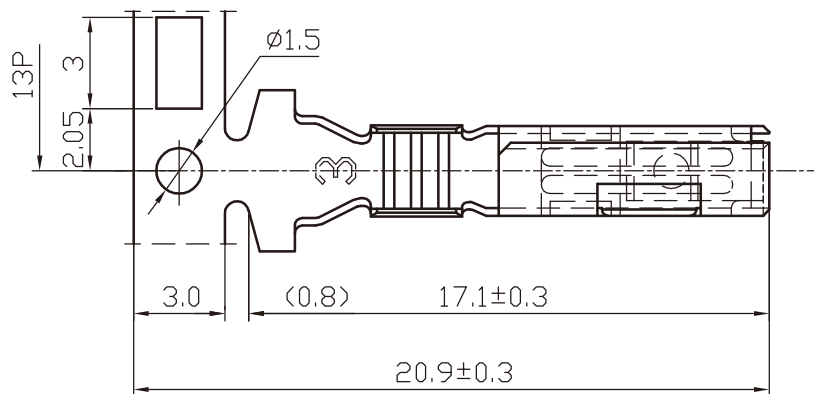


SEC.A-A



SEC.B-B

說明:

1.表面處理:

預鍍錫膜厚40u"-70U"
鍍金膜厚5u"以上

2.對手件: TAB=0.6

插入力: 0.3-0.8kg

E: 拉拔力: 0.3-0.8kg

1.SURFACE TREATMENT:

PRE-TIN PLATED THICKNESS



40u"-70U"

GOLD PLATING THICKNESS MORE THAN 5u"

2.MATING PART: TAB=0.6

INSERTED FORCE: 0.3-0.8kg

TENSILE FORCE: 0.3-0.8kg

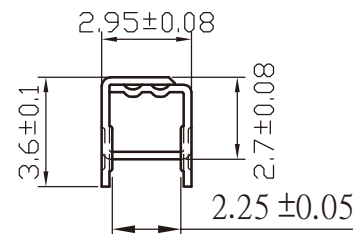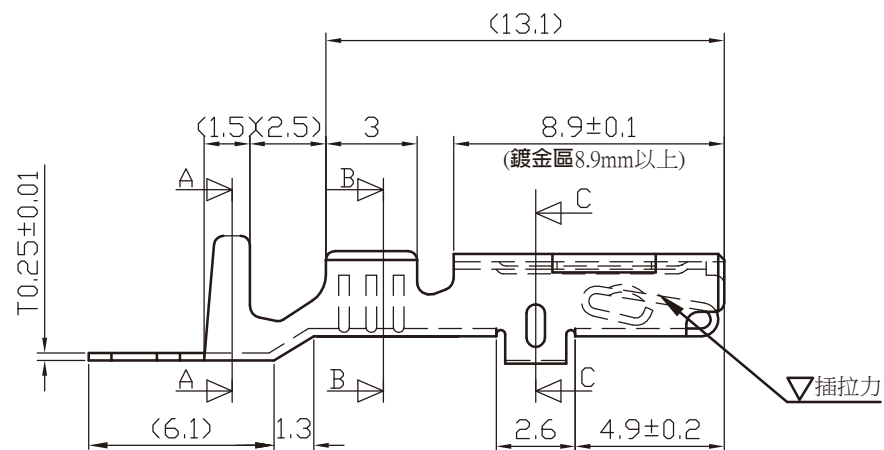

SEC.C-C

3	Brass	Note 1	0.85-1.25mm ²
2	Copper Alloys	Note 1	0.85-1.25mm ²
1	Copper Alloys	Note 1	0.85-1.25mm ²
NO.	材料 Material	表面處理 Surface Treatment	線徑 Wire Range

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

Q090YS-FT-16-LF

SERIES

LEADFREE

16 AWG

TERMINAL

FEMALE

DESCRIPTION: