


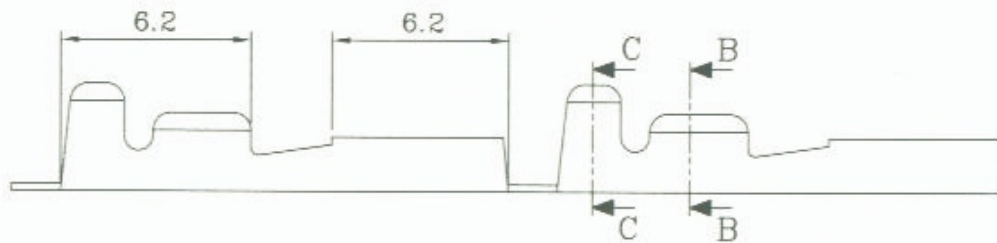



NOTE:

1. 表面處理  
鍍錫 40u"以上

1. SURFACE TREATMENT:  
TIN PLATING  
THICKNESS MORE THAN 40u"

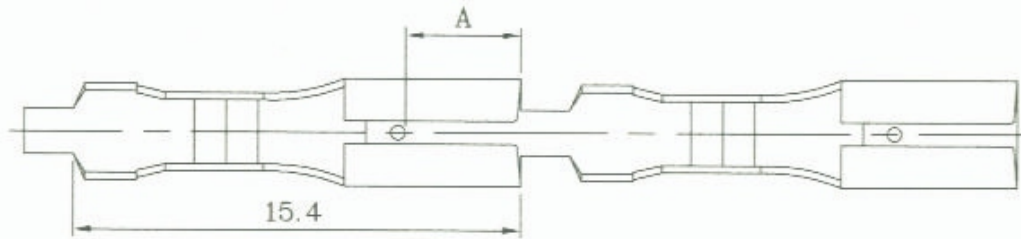

			材質	JIS2600EH
1.0~1.5kg	1.5~2.5kg	1.5~6.0kg	MATERIAL	
0.7~1.0kg	1.0~1.8kg	1.5~6.0kg	料厚	0.25
A 點插入力	插入力	拉拔力	間距	17.5
A INSERTED FORCE	INSERTED FORCE	TENSILE FORCE	PITCH	

適用電線 22~20  
WIRE RANGE  
包裝數量 15000  
PACKING QTY PCS/B

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

P PROJECTION



ORDER INFORMATION

Q110-FTx-20-LF  
SERIES  
LEADFREE  
20~22AWG  
5:0.5mm TAB  
8:0.8mm TAB  
TERMINAL  
FEMALE

DESCRIPTION: