


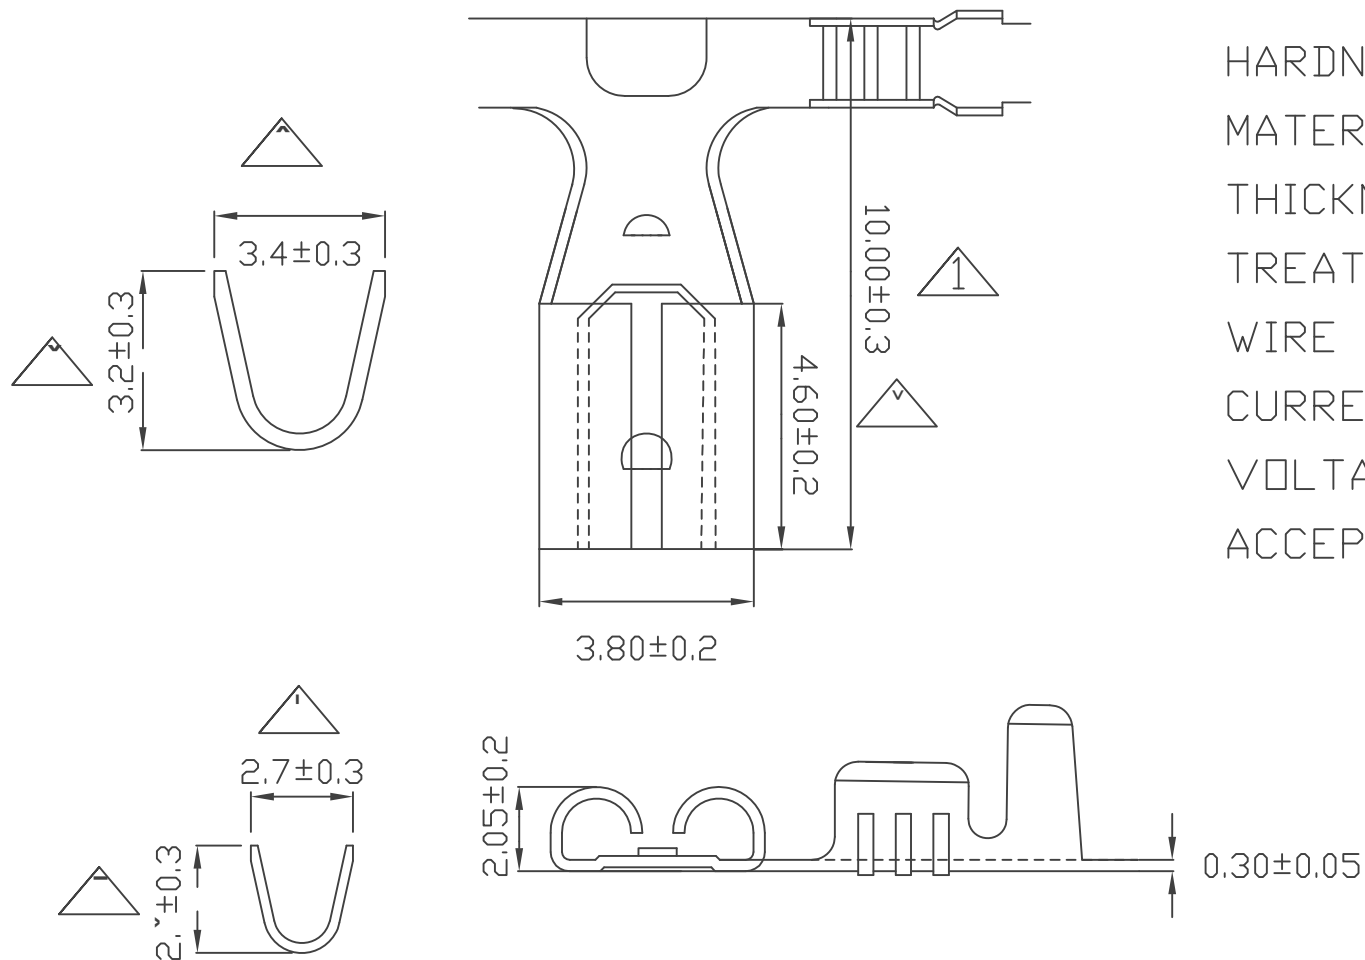

HARDNESS:SH
 MATERIAL:BRASS
 THICKNESS:0.30mm
 TREATMENT:TIN PLATED
 WIRE RANGE:AWG#16-20
 CURRENT RATING:5A AC,DC
 VOLTAGE RATING:250V AC,DC
 ACCEPT WITH:110" TAP PLUG

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PROJECTION

照片框

ORDER INFORMATION

Q110-GT8-16-LF
 SERIES | | | LEADFREE
 | | | 16-20 AWG
 | | | THICKNESS 0.8mm
 | | | TIN
 | | | FLAG

DESCRIPTION: