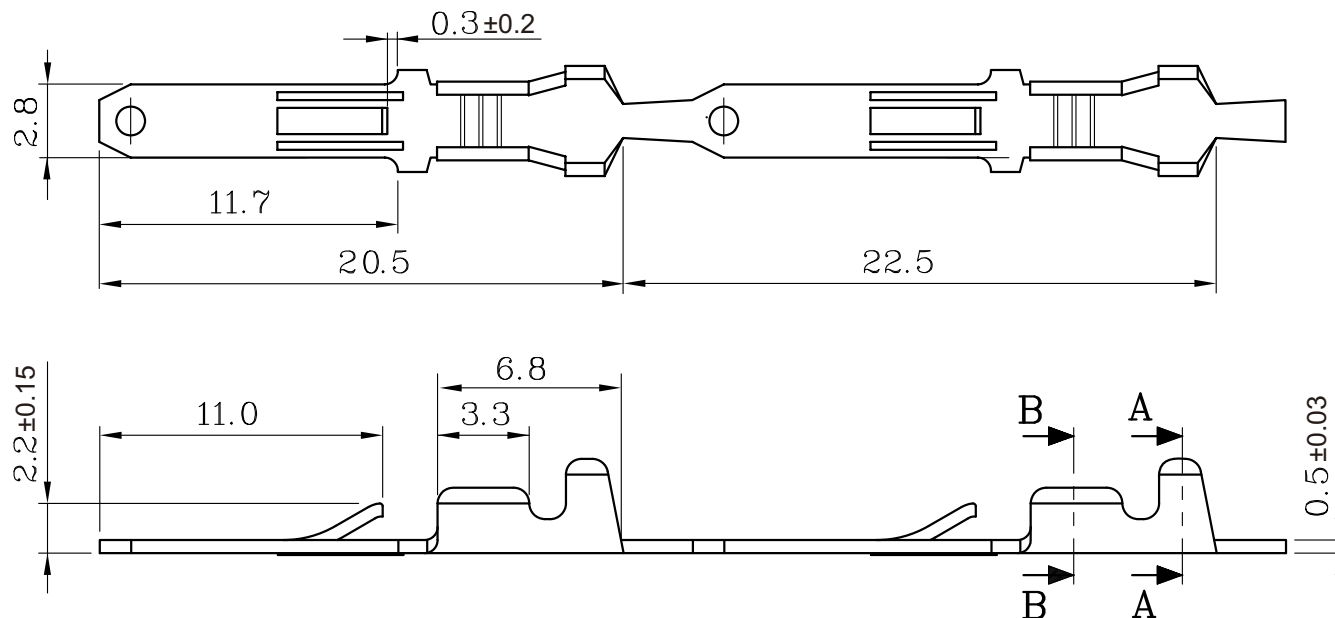


NOTE:

1. 表面處理
鍍錫 60u 以上

1.SURFACE TREATMENT:
TIN PLATING
THICKNESS MORE THAN 60u

適用電線 18~16
WIRE RANGE

料 厚 0.5
THICKNESS

包裝數量 10000
PACKING Q'TY PCS/R

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±


.X ± 0.20

.XX ± 0.10

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

Q110-Mx5LK-16-LF

SERIES LEADFREE

16 WAY

LOCK

0.5mm TAB

B:BRASS

T:TIN/PLATE

MALE TERMINAL

DESCRIPTION: 110 公勾, 直式高腳