






FUSE CLIP P.C.BOARD TYPE FOR ATS BLADE FUSE

SPECIFICATIONS:

- *Electical:Rating for currents up to 15A
- *Material:Phosphor Bronze Thickness=0.3mm
- *Finish:Tin-plated or Nickel-plated
- *Ear or earless type, with axial and direction tags.

#Specifications :

- 1.Insertion & Extraction Force=1kg.Min.
- 2.Dielectric Strength For 60 Seconds=AC 500 V Min.
- 3.Suitable Rated Current=15A 250V
- 4.Insulation Resistance At 500 V DC=100M Ω Min
- 5.Temperature Rise=50°C Max.
- 6.Voltage Drop=20m V Max.

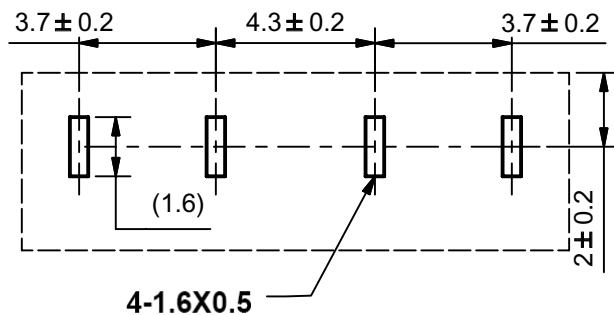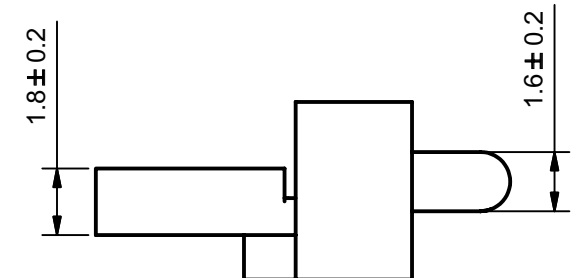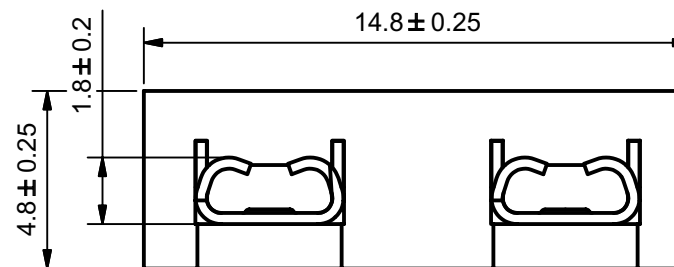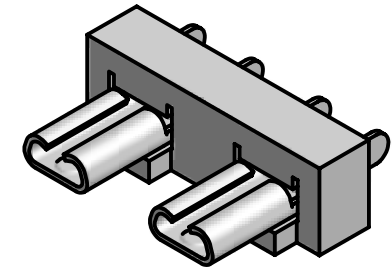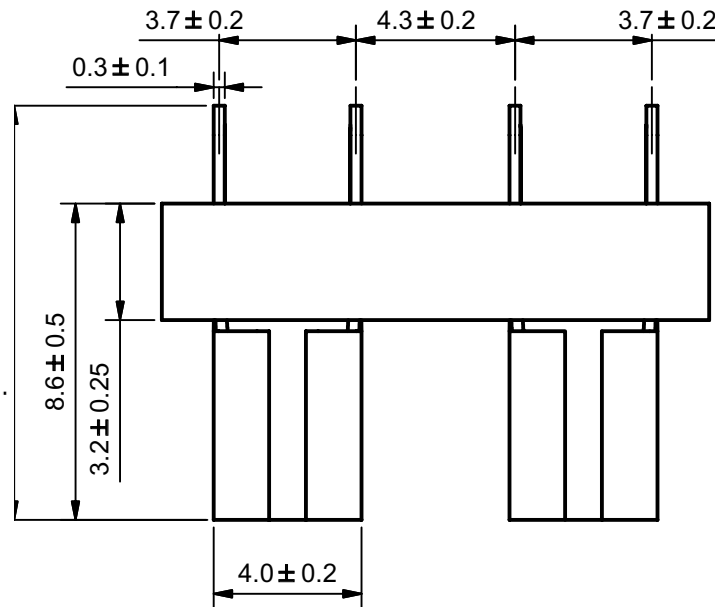

MOUNTING HOLES

RoHS Compliant

TOLERANCES ARE

X.±
.X±
.XX±
.XXX±
ANG±

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE
SIZE A4 PROJECTION

照片框

ORDER INFORMATION

Q118-FD-1X02-LF
SERIES 02 WAY LEADFREE
DIP 180°
FEMALE

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com