

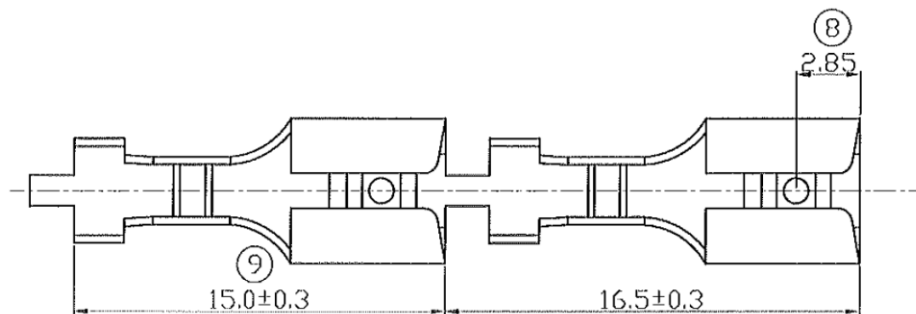



SEC. A-A



SEC. B-B

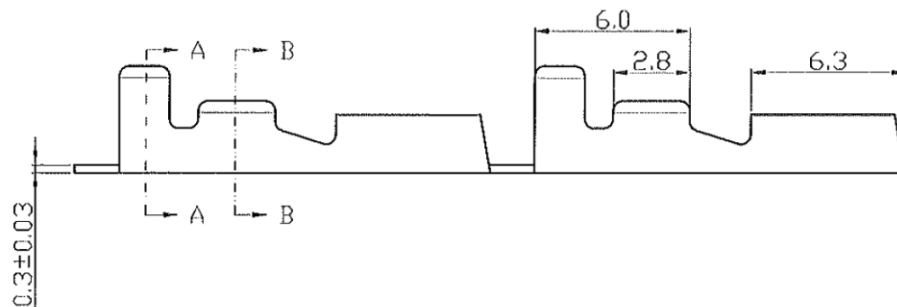

NOTES:

1. 插拔力:

- 1.1 插入力: 1.5~2.5 KGF.
- 1.2 拔出: 2.5~8.0 KGF.

2. 包裝數量: 10000 PCS/R

1. INSERTED/TENSILE FORCES:

- 1.1 INSERTED FORCE: 1.5~2.5 KGF.
- 1.2 TENSILE FORCE: 2.5~8.0 KGF.

2. PACKING Q'TY: 10000 PCS/R

Q187-FT8-18	16.5	0.3~0.8	22~18	黃銅 BRASS	鍍錫 TIN PLATING
PART NO. 編 號	PITCH 間 距	MM 線 徑 WIRE SIZE	AWG 線 徑 WIRE SIZE	MATERIAL 材 質	FINISH 表面處理

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1:1

.XXX±

DATE

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

Q187-FT8-18-LF

SERIES | | | LEADFREE
18~22 AWG
THICKNESS 0.8mm
TERMINAL
FEMALE

DESCRIPTION: 187-8 中腳