


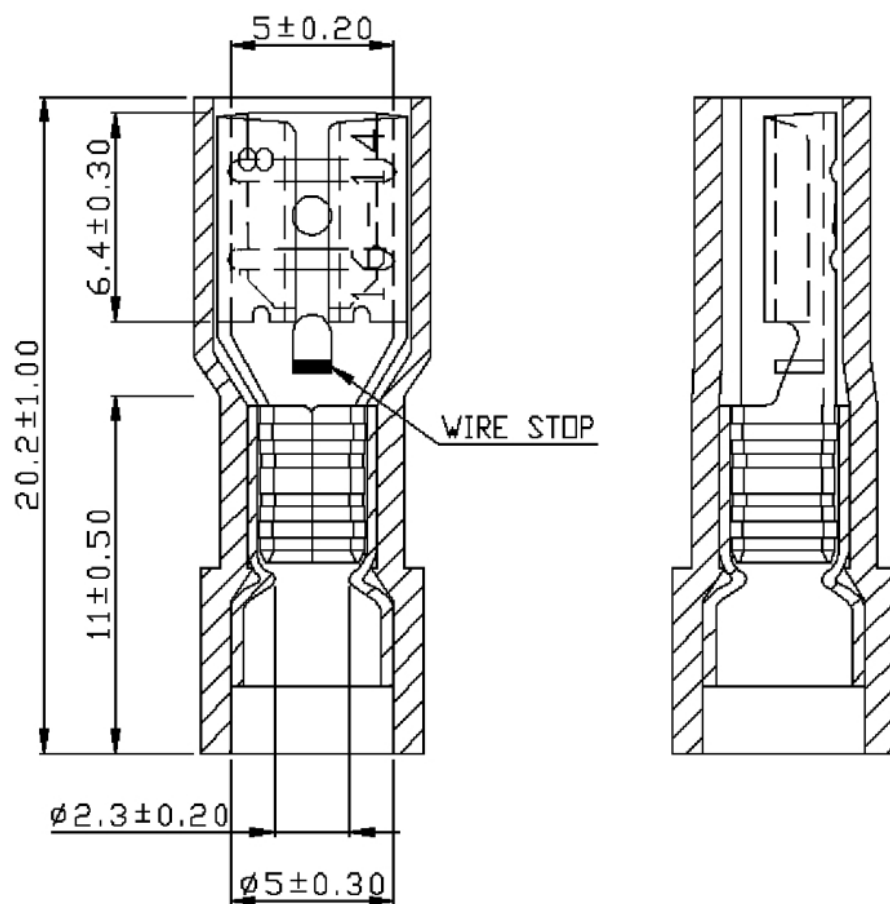

# NOTE:

1. MAXIMUM ELECTRIC CURRENT : 

|        |    |    |  |
|--------|----|----|--|
| A.W.G. | 16 | 14 |  |
| AMP.   | 10 | 15 |  |
2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
3. INSULATION MATERIAL : NYLON
4. INSULATION COLOR : BLUE
5. TERMINAL MATERIAL : BRASS
6. WIRE RANGE : 16-14 A.W.G.( 1.5-2.5 mm<sup>2</sup>)
7. TERMINALS SURFACE TREATMENT : TIN PLATED
8. DOUBLE CRIMP : WITH COPPER SLEEVE ON BARREL
9. NEMA TAB : 0.032 \* 0.187 (0.8 \* 4.75)
10. TERMINALS THICKNESS : 0.35 mm

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

## ORDER INFORMATION

Q187-FT8NFC-14-LF

|        |           |          |
|--------|-----------|----------|
| SERIES | TERMINAL  | LEADFREE |
| FEMALE | FULL      | 14~16AWG |
|        | NYLON     | COPPER   |
|        | 0.8mm TAB |          |

DESCRIPTION: