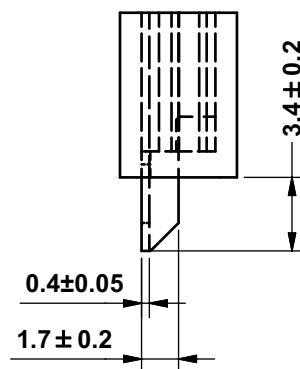
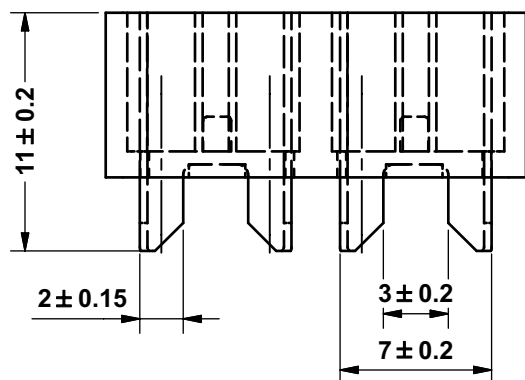
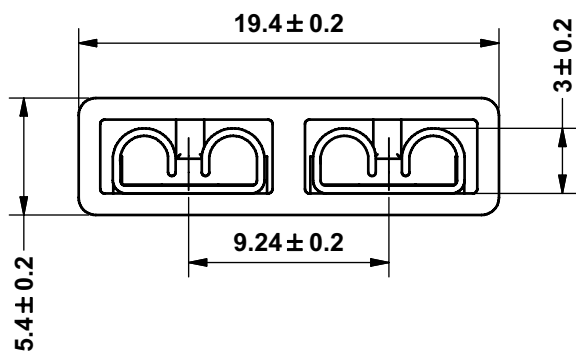


MOUNTING HOLES

PCB mount Fuse Clip for ATU Blade fuse

Specification:

Electrical:Max. 30A

Material:Brass



Finish:Tin-plated

Contact Resistance:Max.50mΩ

Mechanical test:insertion & Extraction Force 2.0~5.0kgs.

Dielectric Strength:Min.AC 1000 V

Insulation Resistance At 500 V DC:100MΩ Min.

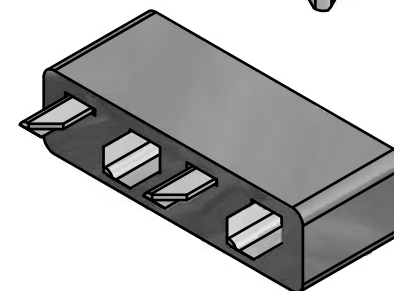

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.50
.XX ± 0.25
.XXX ±
ANG ± 2°

照片框

ORDER INFORMATION

Q205-FDBK-1X02-LF

SERIES
BLACK
DIP 180°
FEMALE
LEADFREE
02 WAY

DESCRIPTION: Fuse Clip for PCB Mounted