


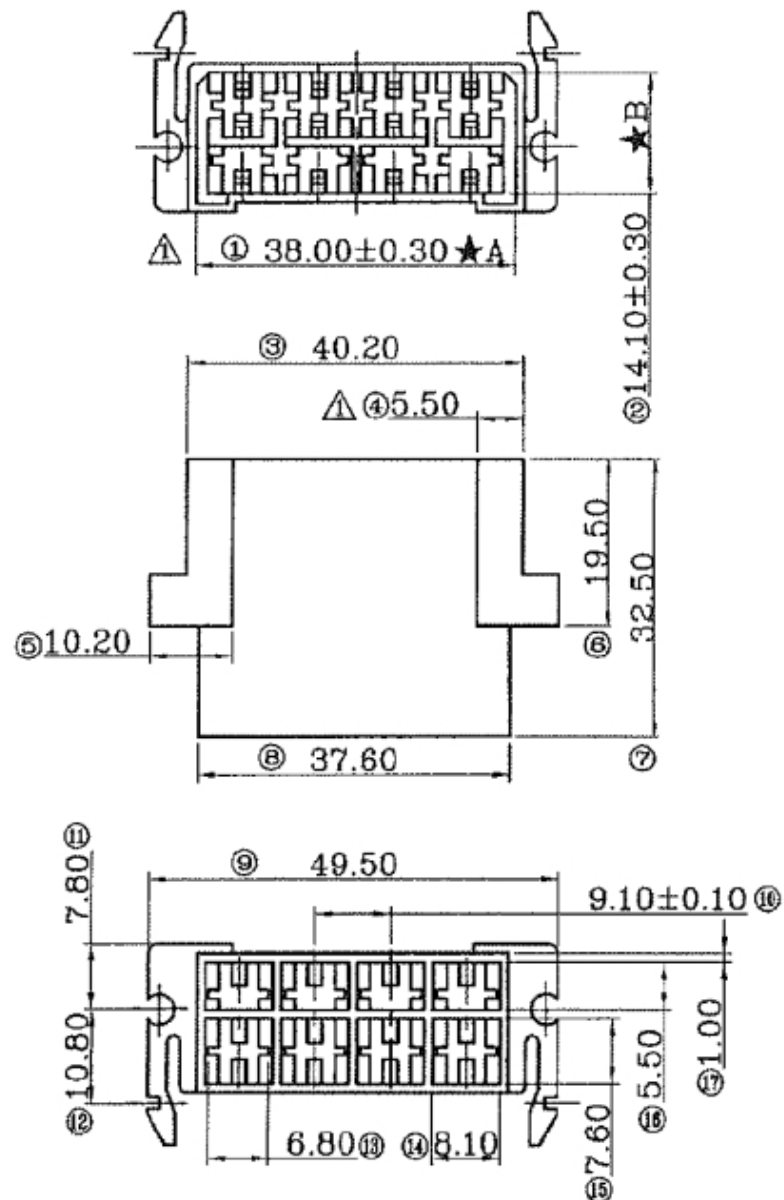

GENERAL TOLERANCE						
	10 MAX	50 MAX	100 MAX	250 MAX	250 PPH	ANGLE
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30°
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30°
C	±0.3	±0.5	±0.8	±1.4	±2.0	±30°

REMARKS:

1.APPLICABLE TERMINAL

2.COLOR: BLACK

3.COUNTER PART:---

4.ALL THE DIMENSIONS ARE MEASURED UNDER GRADE "B" UNLESS OTHERWISE SPECIFIED.

照片框

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

ORDER INFORMATION

Q250-FHFL-08-LF

SERIES
LEADFREE
08 WAY
FLANGGE LOCK
HOUSING
FEMALE

DESCRIPTION: