


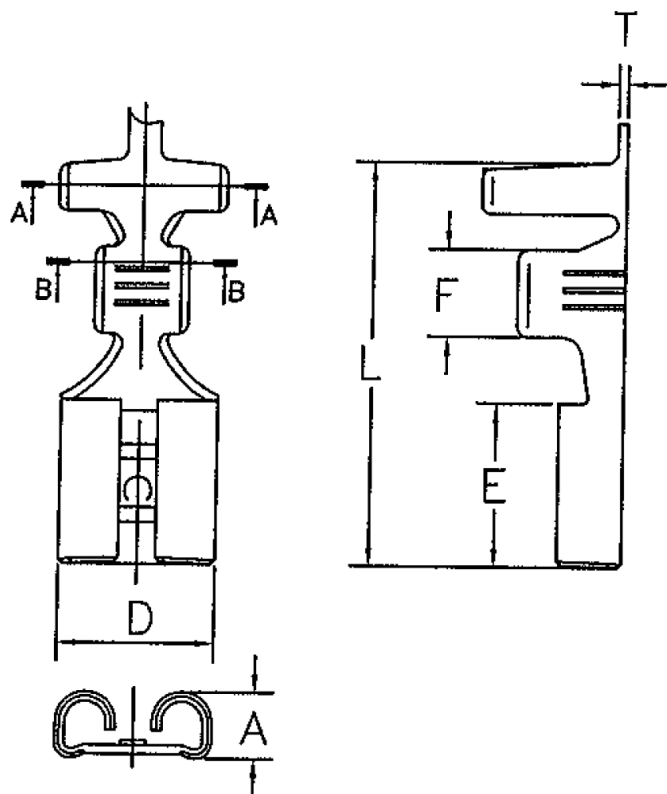


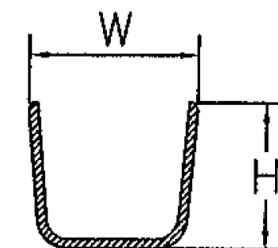

T: 0.45

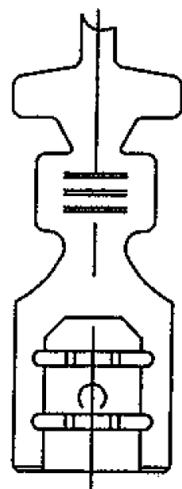

A-A SECTION



B-B SECTION

ITEM	SPECIFICATION
T	0.45 ±0.03
L	19.4 ±0.25
D	7.6 ±0.10
E	7.8 ±0.20
F	4.2 ±0.20
A	3.2 ±0.10
W	8.2 ±0.25
W1	4.6 ±0.25
H	7.0 ±0.25
H1	5.2 ±0.25

WIRE GAUGE AWG	DIMENSIONS T x W x P	STD PKG Q'TY	NW KGS	MATERIAL /FINISH	SURFACE PROCESS	SERIAL OR SINGLE TYPE
10-12	--	4000	3.9kg	C2680-SH	Unplating/Tin-plated	Serial

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

Q250-FT8-10-LF

SERIES

T

LEADFREE

10-12 AWG

THICKNESS 0.8mm

TIN PLATED

FEMALE

DESCRIPTION: