

NOTES:

1. 插拔力:

1.1 插入力: 2.5~3.5 KGF 以下

1.2 拔出力: 4~8 KGF



2. 包裝數量: 4000 PCS/R

1. INSERTED/TENSILE FORCES:




1.1 INSERTED FORCE: 2.5~3.5 KGF.

1.2 TENSILE FORCE: 4~8 KGF.

2. PACKING Q'TY: 4000 PCS/R

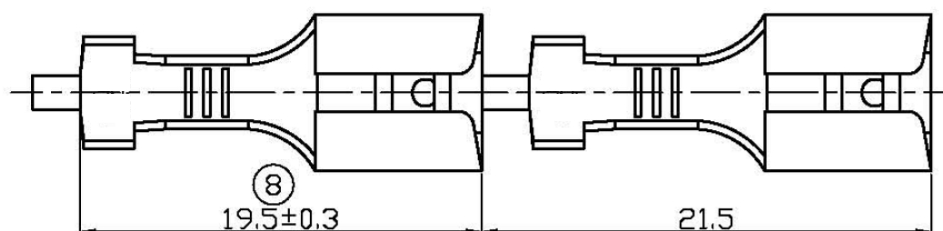

SEC. A-A

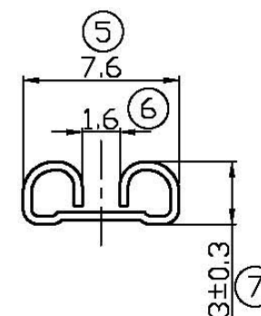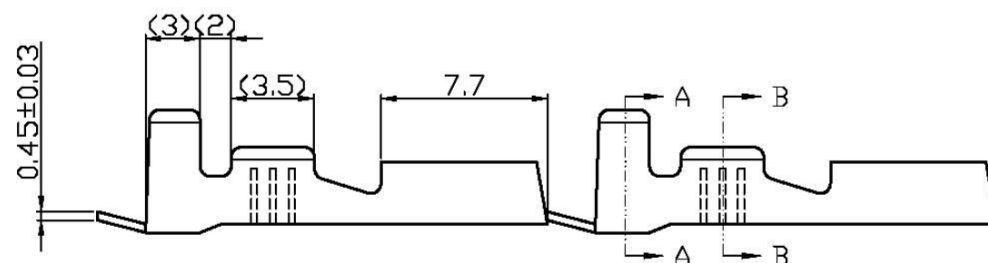

SEC. B-B

Q250-FT8-12	21.5	2.0~3.5	14~12	黃銅 BRASS	鍍錫 TIN PLATING
PART NO. 編 號	PITCH 間 距	MM 線 徑	AWG WIRE SIZE	MATERIAL 材 質	FINISH 表面處理

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

Q250-FT8-12-LF
SERIES T LEADFREE
12~14 AWG
THICKNESS 0.8mm
TIN PLATED
FEMALE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.20
ANG ± 3°

DESCRIPTION: