


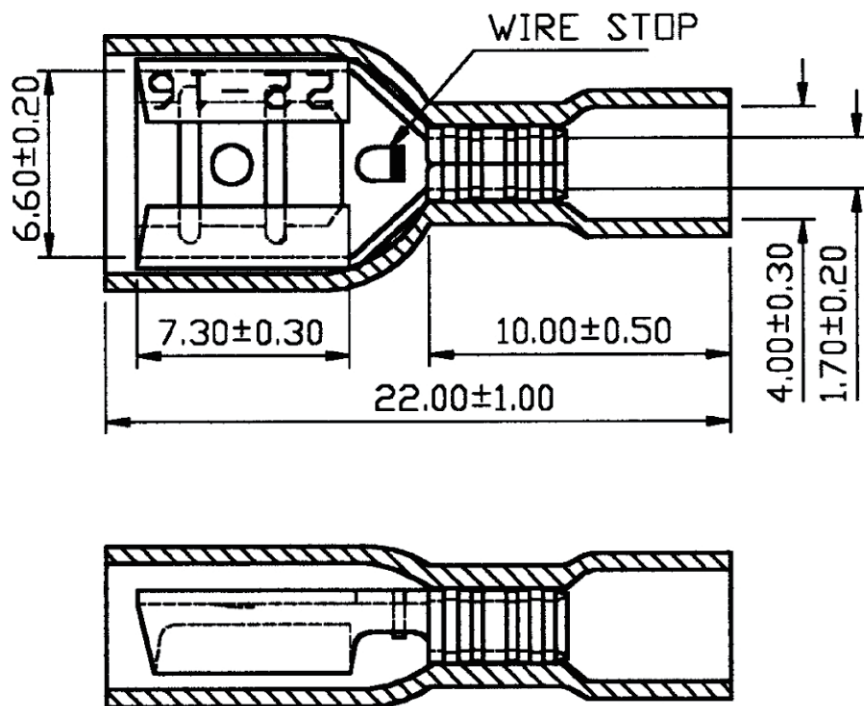

NOTE:

1. MAXIMUM ELECTRIC CURRENT: 10 AMPERE
2. MAXIMUM ELECTRICAL RATING:
75°C 300 VOLTS MAX.
3. INSULATION MATERIAL: VINYL
4. INSULATION COLOR: RED
5. TERMINAL MATERIAL: BRASS
6. TERMINAL THICKNESS: 0.4mm
7. WIRE RANGE: 22-16 A.W.G. (0.5-1.5mm²)
8. NEMA TAB: .032*.250 (0.8*6.35)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

Q250-FT8VF-16-LF
SERIES
LEADFREE
16-22 AWG
FULL
VINYL
THICKNESS 0.8mm
TIN PLATED
FEMALE

DESCRIPTION: