
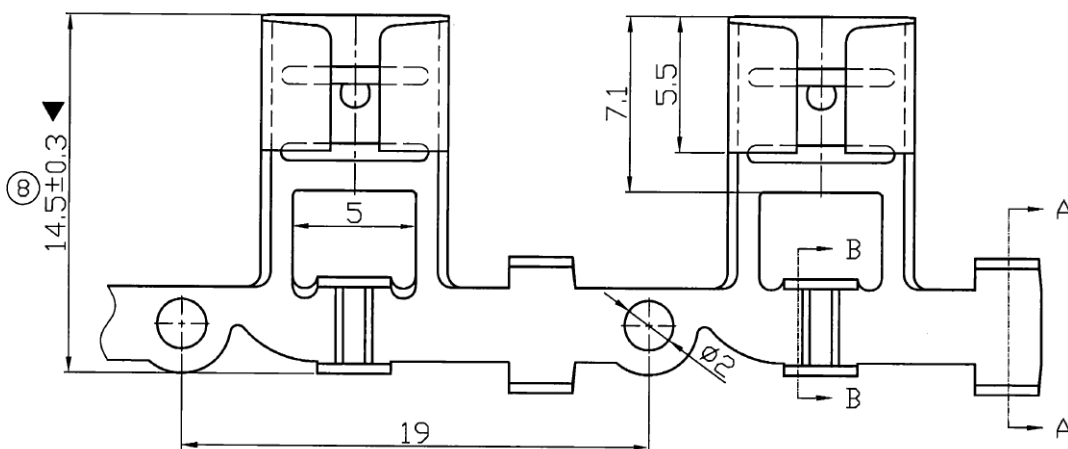



SEC. A-A

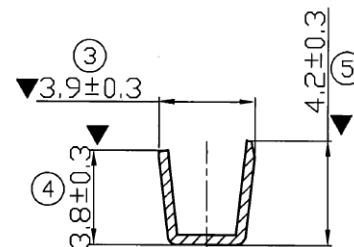

SEC. B-B

NOTES:

1. 插拔力:
1.1 插入力: 2.0~3.0 KGF
1.2 拔出力: 4.0~8.0 KGF

2. 包裝數量: 3000 PCS/R

1. INSERTED/TENSILE FORCES:
1.1 INSERTED FORCE: 2.0~3.0 KGF
1.2 TENSILE FORCE: 4.0~8.0 KGF

2. PACKING Q'TY: 3000 PCS/R

Q250-GT8-12	19	2.0~3.5	14~12	黃銅 BRASS	預鍍錫 PRE-TIN	
PART NO. 編號	PITCH 間距	MM 線徑	AWG WIRE SIZE	MATERIAL 材質	FINISH 表面處理	REMARK 備註

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

Q250-GT8-12-LF

SERIES

LEADFREE

12~14AWG

0.8t

TERMINAL
FLAG

DESCRIPTION: