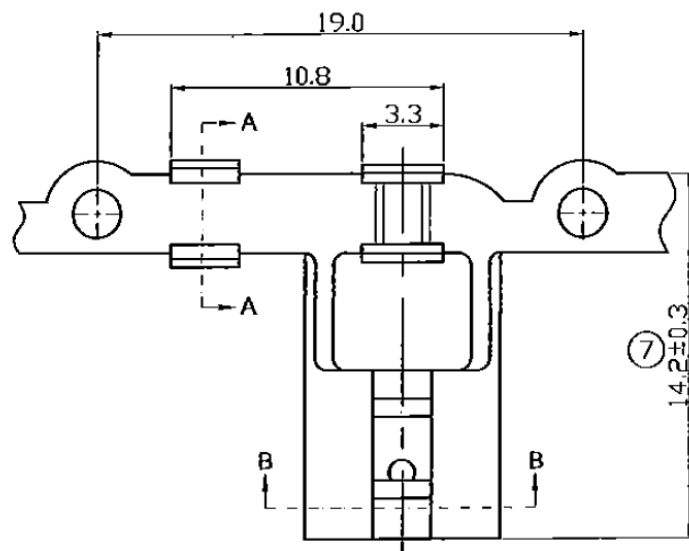


NOTES:

1. 插拔力:
1.1 插入力: 2.0~3.0 KGF
1.2 拔出力: 4.0~8.0 KGF
2. 包裝數量: 4000 PCS/R

1. INSERTED/TENSILE FORCES:
1.1 INSERTED FORCE: 2.0~3.0 KGF.
1.2 TENSILE FORCE: 4.0~8.0 KGF.
2. PACKING Q'TY: 4000 PCS/R

Q250-GT8-14	19.0	0.8~2.0	18~14	黃銅 BRASS	鍍錫 TIN PLATING	
PART NO. 編 號	PITCH 間 距	MM 線 徑	AWG WIRE SIZE	MATERIAL 材 質	FINISH 表面處理	REMARK 備 註

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

Q250-GT8-14-LF
SERIES
LEADFREE
14~18AWG
0.8t
TERMINAL
FLAG

DESCRIPTION: