

NOTE:

1. 表面處理

鍍錫 60u以上

1.SURFACE TREATMENT:



TIN PLATING

THICKNESS MORE THAN 60u

	1.0~1.5kg	2.0~3.0kg	4~8kg
處理 FINISH	A 點插入力 A INSERTED FORCE	插入力 INSERTED FORCE	拉拔力 TEASILE FORCE

14~12 前腳高	4.8	4.5	5.4	5.2	鍍錫 TIN PLATING 素材 NONE
16~14 高腳	4.4	4.2	5.4	5.2	鍍錫 TIN PLATING 素材 NONE
WIRE RANGE	DIM H2	DIM W2	DIM H1	DIM W1	FINISH

材質 MATERIAL	JIS2600EH	一般公差 GENERAL TOLERANCE	X :±0.5 X.X :±0.3 X.XX:±0.1	X.XXX:±0.05 ANGLES ±3°	比例 SCALE
料厚 THICKNESS	0.4	包裝數量 PACKING Q'TY	2500 PCS/R	適用電線 WIRE RANGE	
間距 PITCH	19.2	對手件 MATING PART	TAB:	0.8t	

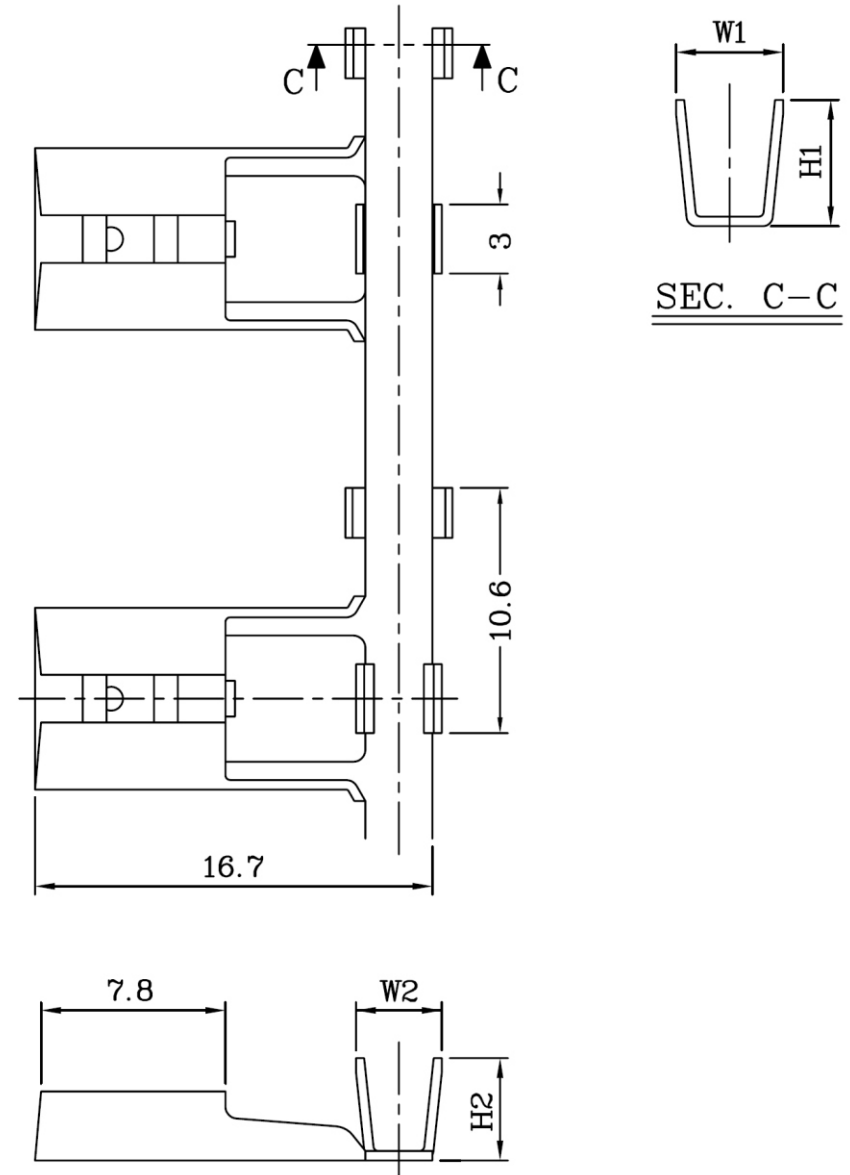

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1


.XXX ±

DATE

ANG ±

SIZE A4

PPOJECTION



ORDER INFORMATION

Q250-GT8-xx-LF  
SERIES | LEADFREE  
12:12~14AWG  
14:14~16AWG  
0.8t  
TERMINAL  
FLAG

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: