


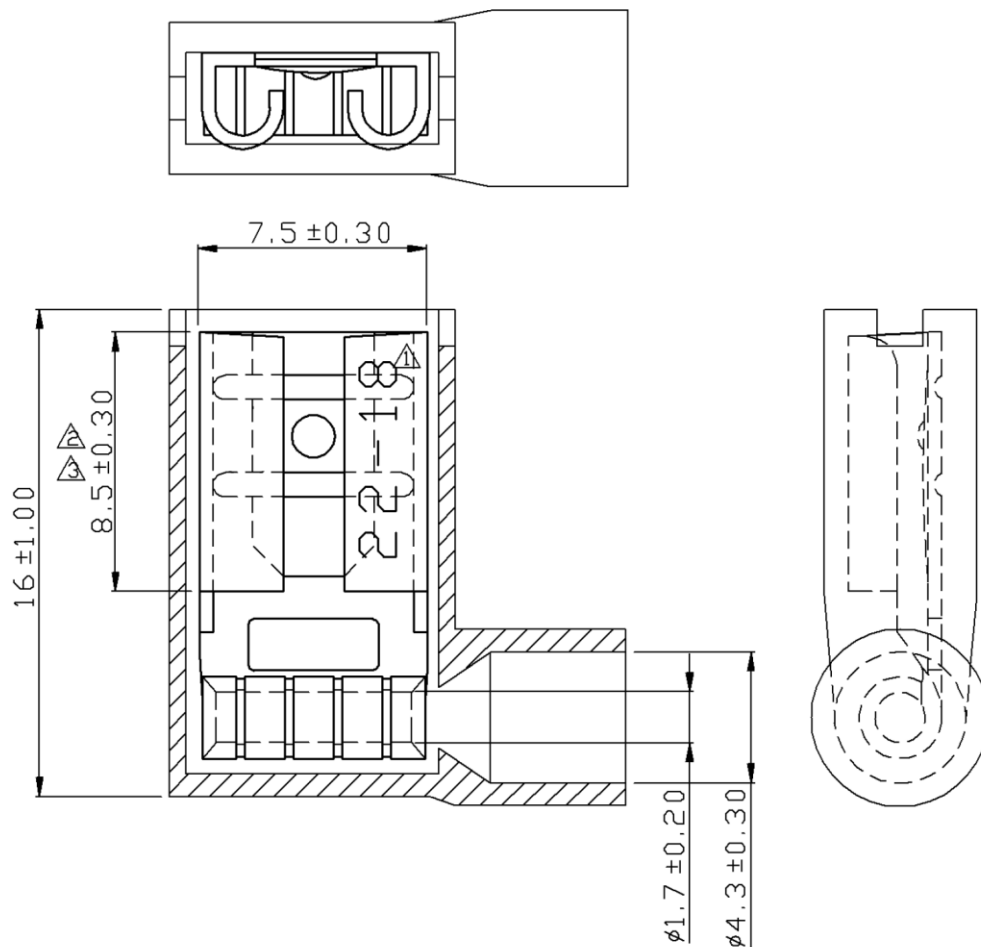

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18
AMP.	3	4	7
2. MAXIMUM ELECTRICAL RATING : 105°C 300 VOLTS MAX.
3. INSULATION MATERIAL : NYLON
4. INSULATION COLOR : RED
5. TERMINAL MATERIAL : BRASS
6. WIRE RANGE : 22-18 A.W.G. (0.5-0.75 mm²)
7. NEMA TAB : 0.032 inch * 0.250 inch (0.8 mm * 6.35 mm)
8. TERMINAL SURFACE TREATMENT : TIN PLATED
9. TERMINAL THICKNESS : 0.45 mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

Q250-GT8NF-18-LF
SERIES LEADFREE
18-22AWG
FULL
NYLON
0.8t
FLAG TERMINAL

DESCRIPTION: