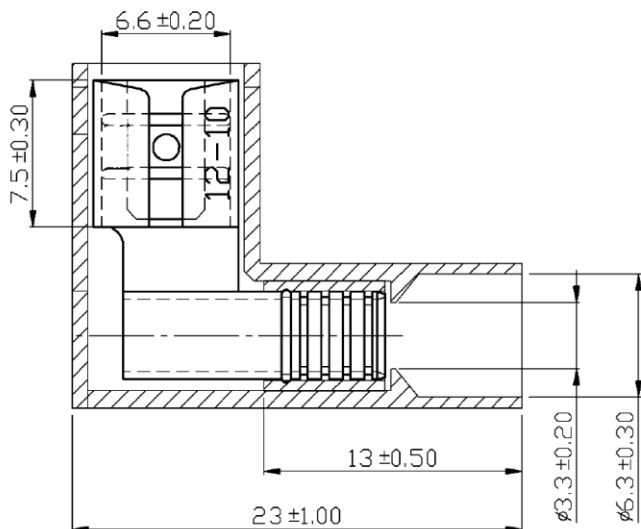
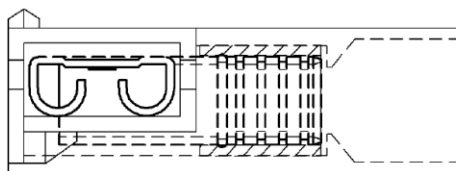


NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	12	10	
AMP.	20	24	

2. MAXIMUM ELECTRICAL RATING : 105°C 300 VOLTS MAX.

3. INSULATION MATERIAL : NYLON

4. INSULATION COLOR : YELLOW

5. TERMINAL MATERIAL : BRASS

6. WIRE RANGE : 12-10 A.W.G. (4-6 mm²)

7. NEMA TAB : 0.032 inch * 0.250 inch (0.8 mm * 6.35 mm)

8. DOUBLE CRIMP : WITH SHORT COPPER SLEEVE ON BARREL

9. TERMINAL SURFACE TREATMENT : TIN PLATED

10. TERMINAL THICKNESS : 0.40 mm

11. INSERTING & SEPARATING FORCE AFTER PLATING :

1ST INSERTION : 6.5 kg↓ ; SEPARATION : 4.5 kg↑

△ 6TH SEPARATION : 1.83 kg↑

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X.±

.X±

.XX±

.XXX±

ANG±

照片框

ORDER INFORMATION

Q250-GT8NFC-10-LF

SERIES
FLAG
TERMINAL
FULL
NYLON
0.8t
LEADFREE
10-12AWG
COPPER

DESCRIPTION: NYLON-INSULATED DOUBLE CRIMP FLAG FFMALF DISCONNECTORS