

GENERAL TOLERANCE							
	10 MAX	50 MAX	100 MAX	250 MAX	250 OVER	ANGLE	ECCENTRIC
A	± 0.15	± 0.2	± 0.3	± 0.5	± 0.75	$\pm 30'$	
B	± 0.2	± 0.3	± 0.55	± 0.95	± 1.4	$\pm 30'$	
C	± 0.3	± 0.5	± 0.6	± 1.4	± 2.0	$\pm 30'$	




REMARKS:

1.APPLICABLE TERMINAL P/N:


2.COLOR:NATURE

3.COUNTER PART:

4.ALL THE DIMENSIONS ARE MEASURED UNDER GRADE "B" UNLESS OTHERWISE SPECIFIED.

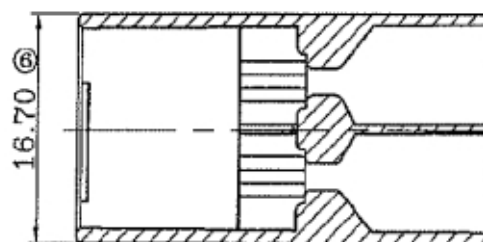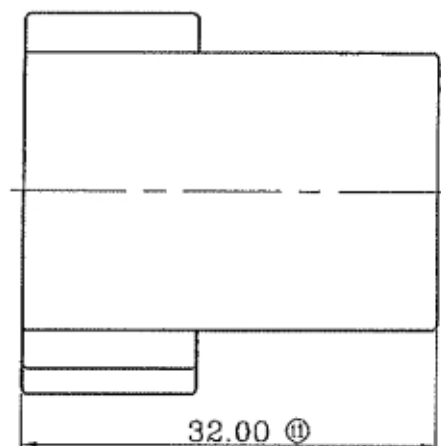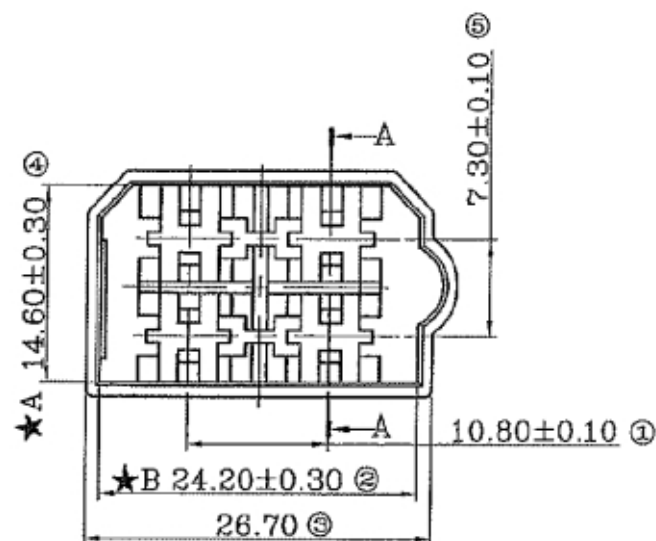

SEC A-A

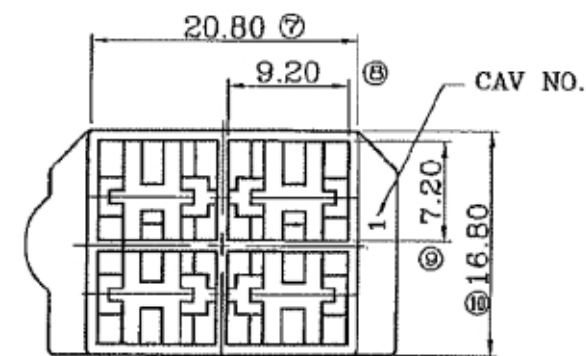

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

Q250-MHFL-04-LF

SERIES

LEADFREE

04 WAY

FLANGE LOCK

MALE HOUSING

DESCRIPTION: