


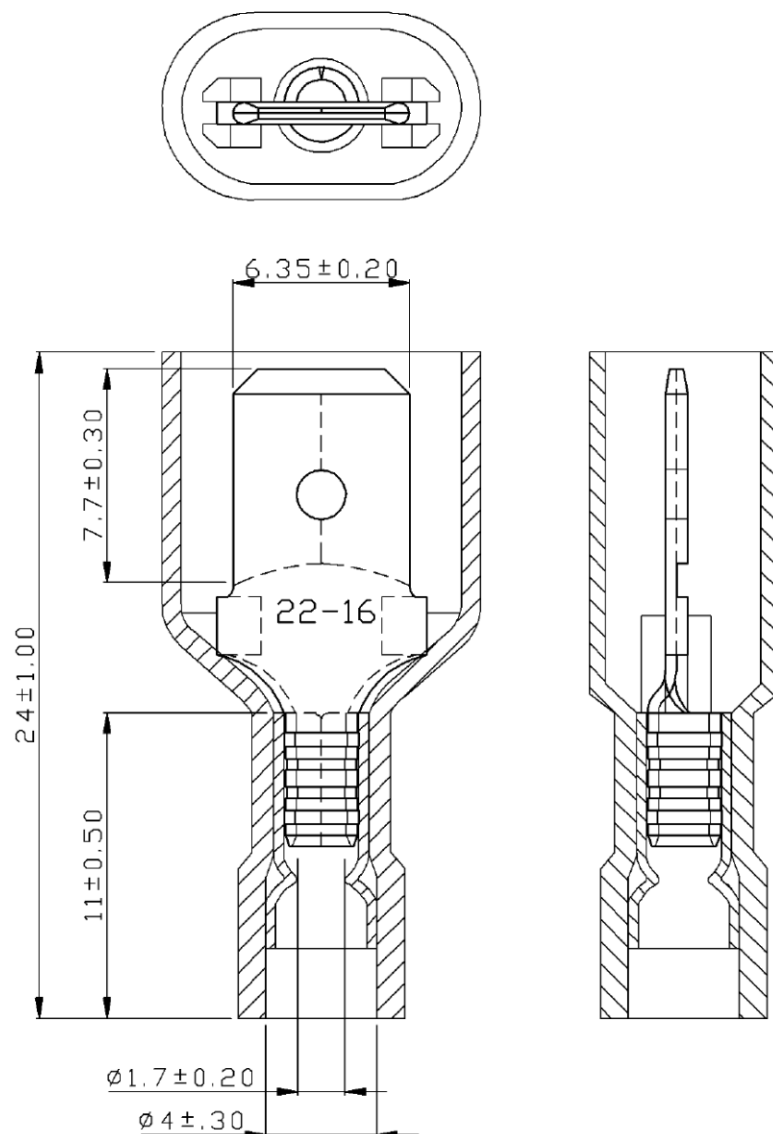

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16
AMP.	3	4	7	10

2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.

3. INSULATION MATERIAL : NYLON

4. INSULATION COLOR : RED

5. TERMINAL MATERIAL : BRASS

6. WIRE RANGE : 22-16 A.W.G. (0.5-1.5 mm²)

7. NEMA TAB : 0.032 inch * 0.250 inch (0.8 mm * 6.35 mm)

8. DOUBLE CRIMP : WITH COPPER SLEEVE ON BARREL

9. TERMINAL SURFACE TREATMENT : TIN PLATED

10. TERMINAL THICKNESS : 0.40 mm

△ 11. THE ASSEMBLY AT UPSIDE OR DOWNSIDE MALE DISCONNECTOR INTO HOUSING IS NORMAL AND MUST NOT AFFECT THE FUNCTION AND THE SIZE

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

Q250-MT8NFC-16-LF

SERIES	MALE	TERMINAL	LEADFREE
			16~22 AWG
			COPPER SLEEVE
			FULL
			NYLON
			0.8mm TAB

DESCRIPTION: