
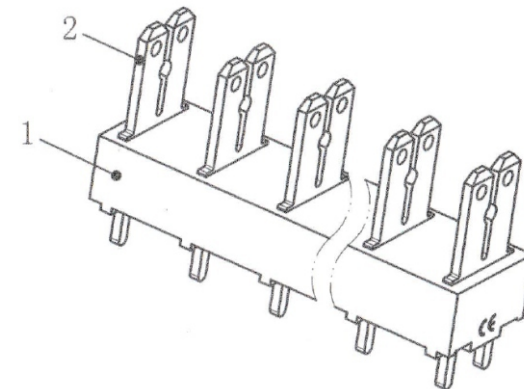
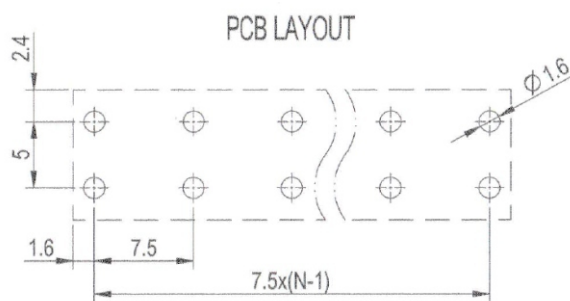


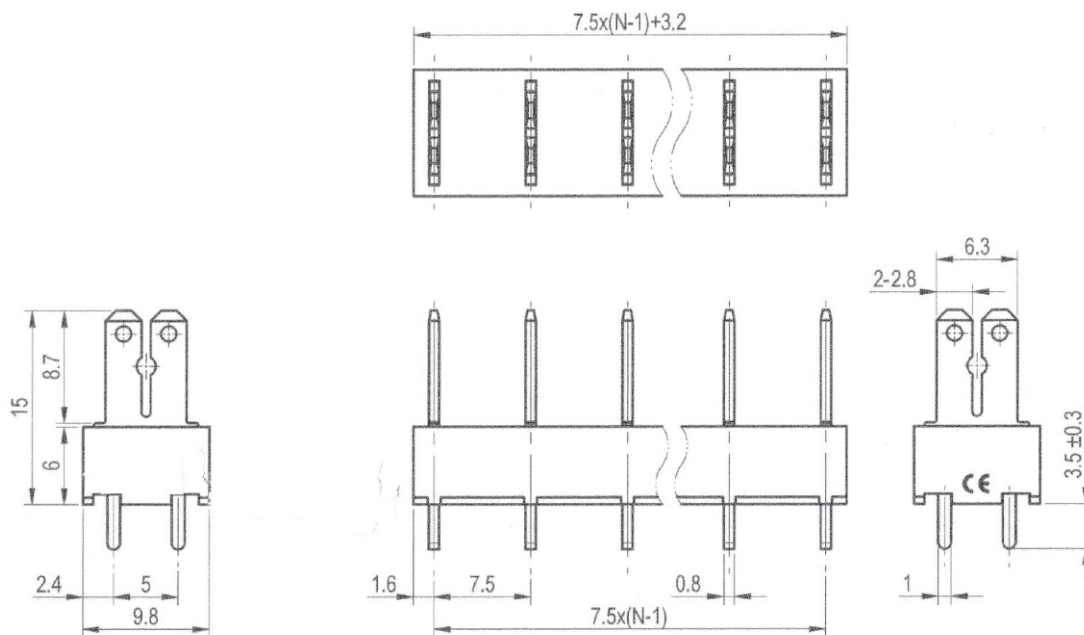

2	Pin header	Copper alloy	Sn plated
1	Housing (Orange)	PA66	UL94V-2
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	750/24	/
工频耐压(V/Min)/Withstanding Voltage(V/Min)	/	AC3000	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	26~14/0.5~2.5		
间距/Pitch(mm)/线数范围/Poles	7.5/N=02~13P		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

Q286475-D-1Xxx-LF

SERIES

LEADFREE

1X02:02WAY

1X13:13WAY

DIP 180°

DESCRIPTION: