


VIEW A

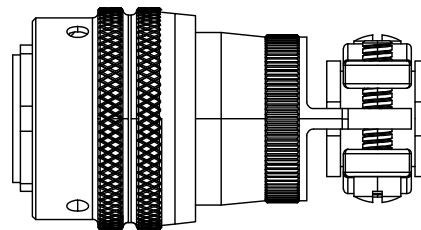

11	Bend Relief	pc	1
10	Cable Clamp	pc	2
9	Sealing Body Jacket	pc	1
8	Sealing	pc	1
7	Straight Wireable Cable Gland Housing 2nd Halt	pc	1
6	Male Contact Pin	pc	3
5	Insulator for 3 Core	pc	1
4	Bushing	pc	1
3	Lock Ring	pc	1
2	Straight Wireable Cable Gland Housing 1st Halt	pc	1
1	Cable Clamp Screw	pc	2
No.	Specification	Unit	Q'ty

Technical Specifications:		Material:	
Coupling:	Bayonet	Shell Material:	Aluminum Alloy, Olive drab
Termination:	Solder	Contact Material:	Copper, Gold Plated
Coding:	A	Insert Material:	Rubber, Black
Pollution Degree:	3	Sealing:	Silicon, Black
Temperature Range:	-55°C ~ +125°C	Sealing Body Jacket	PA
Protection Degree:	IP67	Bushing	Stainless Steel
Mating Cycles:	≥500	Cable Clamp Screw	Stainless Steel
Cable OD:	1200V		
Wire Cross-Section Area	13A		
Electrical:	≤5 mΩ		
Rated Voltage:	≥5000 MΩ		

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

X ± 0.50
X ± 0.38
.XX ± 0.25
.XXX ± 0.10
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

QLM15-PA-03-LF

SERIES | LEADFREE
03 WAY
ASSEMBLY
MALE

DESCRIPTION: MS Series Waterproof Straight Wireable Cable Gland Male 3 Core