

NO.	NAME	MATERIAL	FINISH	Q'TY
1	BARREL	BRASS T:0.4	NICKEL PLATED	1
2	TERMINAL	BRASS T:0.5	TIN PLATED	1
3	HOUSING	PBT G.F.	W.R.Y.B.GR.BL.OR	1

Specification:

Contact Resistance: 30m Ohm Max. At AC 100mA Max. 1KHz.

Insulation Resistance: 100M Ohm Min. At 500V DC.


Rated Voltage And Current: DC 12V, 2A Max.

Dielectric Withstanding Voltage: 500VAC At 60Hz For 1 Minute.


Durability (Life Test): 4000 Cycles.

Insertion Force: 0.3~3.0 Kg.

Extraction Force: 0.3~3.0 Kg.

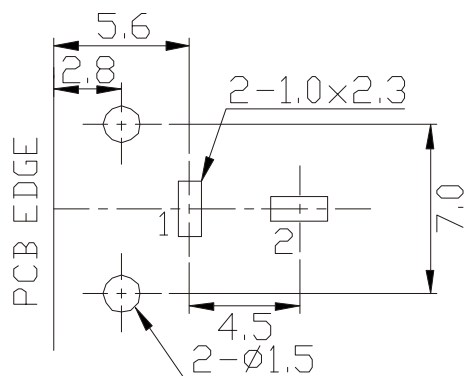

PCB LAYOUT
(BOTTOM VIEW)



COLOR
WH:WHITE
BK:BLACK
RD:RED
BL:BLUE
GR:GREEN
OR:ORANGE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

RCA-JR54P2cc-02-LF
SERIES | JACK | DIP 90° | 5.6+4.5mm | LEADFREE | 02 WAY | BK:BLACK | BL:BLUE | POST x 2

DESCRIPTION: