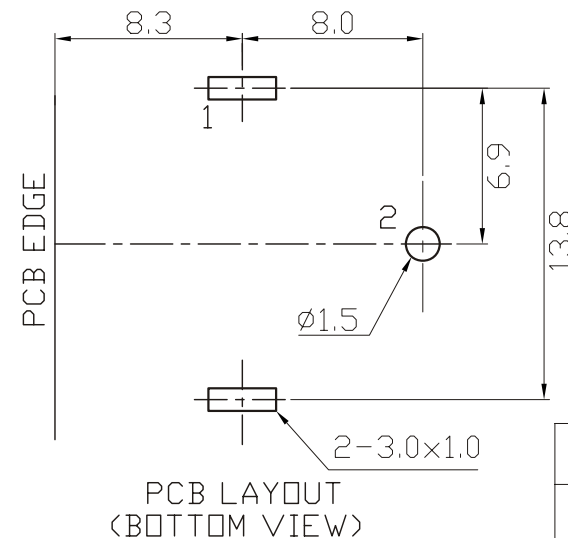
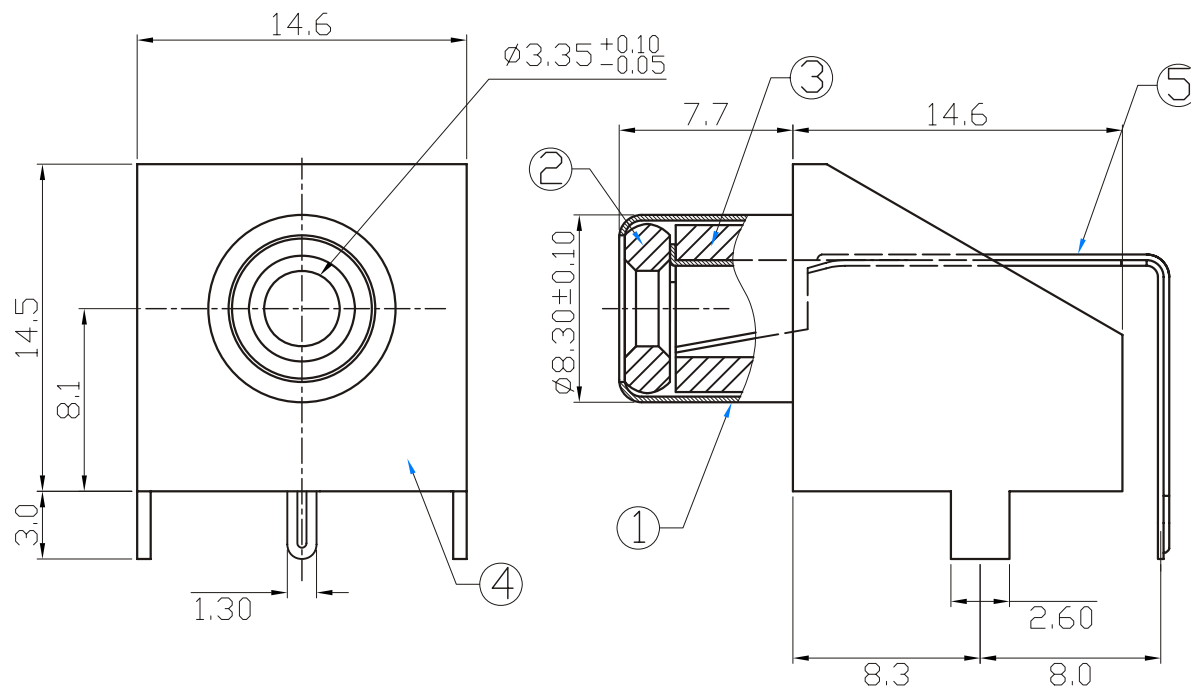


NO.	NAME	MATERIAL	FINISH	Q'TY
1	BARREL	C.R.S 0.30	TIN PLATED	1
2	RING	PBT G.F.	YELLOW/WHITE/RED/BLACK/BLUE/GREEN/ORANGE	1
3	INSULATOR	PBT G.F.	WHITE	1
4	BRACKET	C.R.S 0.60	TIN PLATED	1
5	TERMINAL	BRASS 0.25	TIN PLATED	1

Specification:

Contact Resistance: 30m Ohm Max. At AC 100mA Max.1KHz.

Insulation Resistance: 100M Ohm Min. At 500V DC.

Rated Voltage And Current: DC 12V,2A Max.

Dielectric Withstanding Voltage: 500VAC At 60Hz For 1 Minute.

Durability (Life Test): 4000 Cycles.

Insertion Force: 0.3~3.0 Kg.

Extraction Force: 0.3~3.0 Kg.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

RCA-JR8380xx-02-LF

SERIES

JACK

DIP 90°

FOOT 8.3+8.0mm

YL:YELLOW

WH:WHITE

RD:RED

BK:BLACK

02WAY

BL:BLUE

GR:GREEN

OR:ORANGE

DESCRIPTION: