
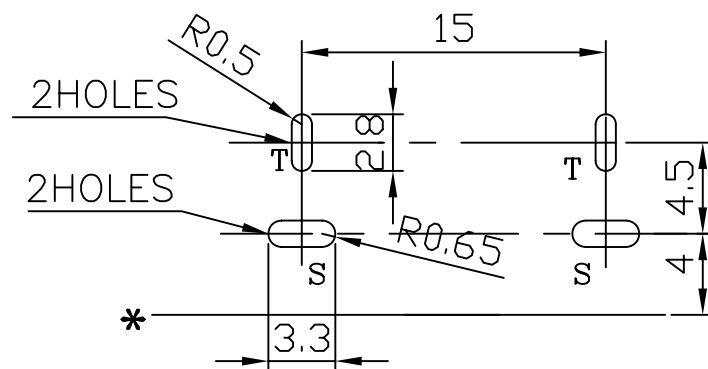
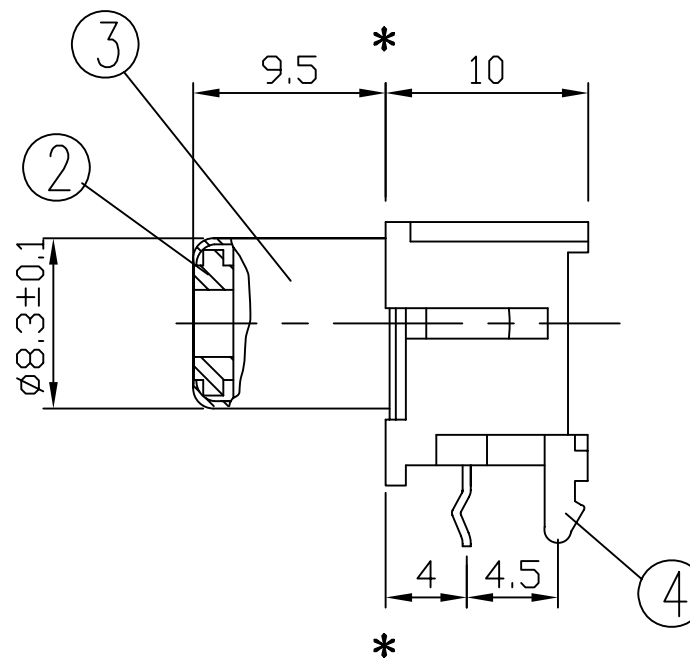


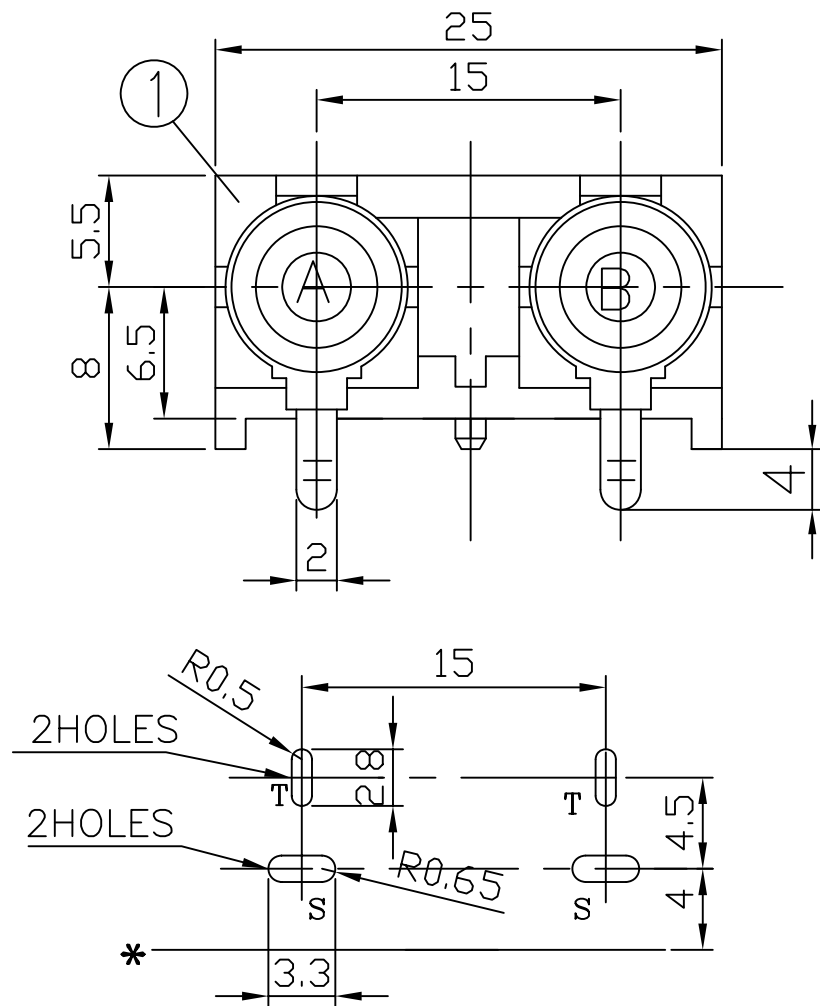

T:1.6 Dimensions of PC board holes

Tolerance : ± 0.05 (Printed-Top view)

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

SCHEMATIC		WASHER COLOR	
		A	B
		RED	WHITE

4	TERMINAL	2	C2680 t=0.3	Cu/Sn PLATED
3	OUTER CONTACT	2	C2680 t=0.4	Au PLATED
2	WASHER	2	PBT 4815	UL-94V0
1	HOUSING	1	PBT 4815	UL-94V0(BLACK)
LTR	PART NAME	QTY	MATERIAL	REMARK

照片框

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ± 0.30

.X, ± 0.30

.XX, ± 0.20

.XXX, ± 0.10

ANG $\pm 1^\circ$

PPOJECTION

ORDER INFORMATION

RCAA2-JR40E0G1RW-02-LF

SERIES

JACK

DIP 90°

GOLD

EAR

4.0mm

LEADFREE

02 WAY

A:RED+B:WHITE

DESCRIPTION: PIN JACK