

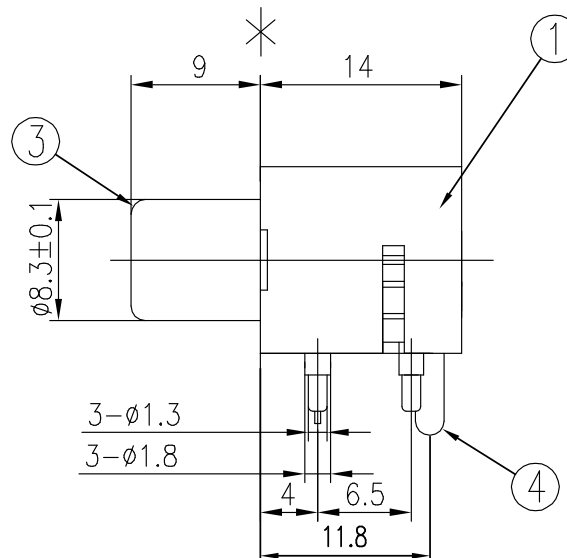
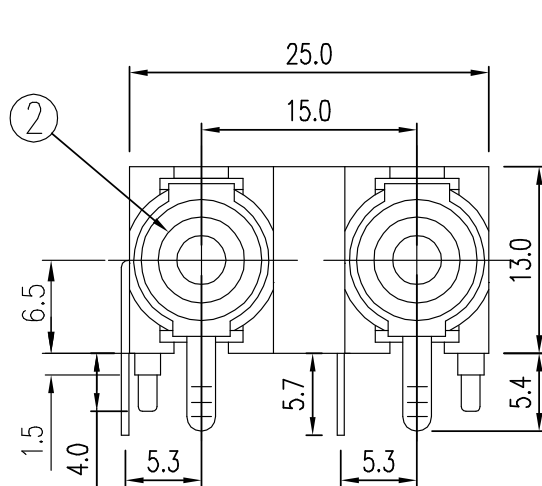


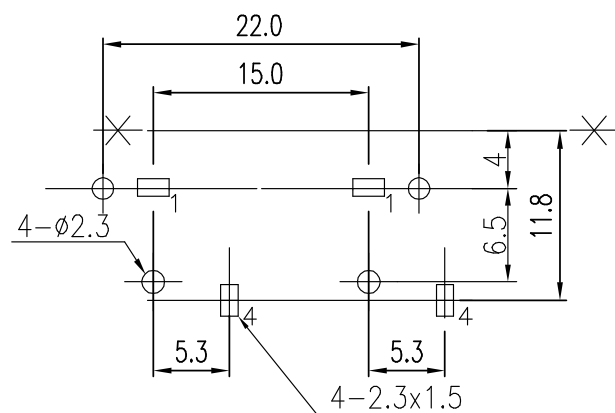

	A	B
TYPE	WHITE	RED

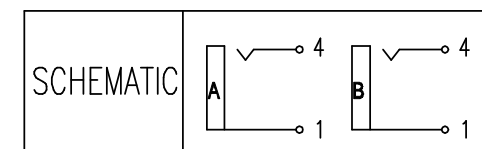

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-TOP view)

4	TERMINAL	2	C2680	t=0.4	Cu/Sn PLATED
3	OUTER CONTACT	2	C2680	t=0.4	Cu/Sn PLATED
2	WASHER	2	PBT		UL-94V0
1	HOUSING	1	PBT		UL-94V0(BLACK)
LTR	PART NAME	QTY	MATERIAL	REMARK	

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

RCAA2-JR40E0P2WR-02-LF

SERIES

JACK
DIP 90°

EAR
4.0mm

POST

LEADFREE
02 WAY
A:WHITE / B:RED

DESCRIPTION: PIN JACK