

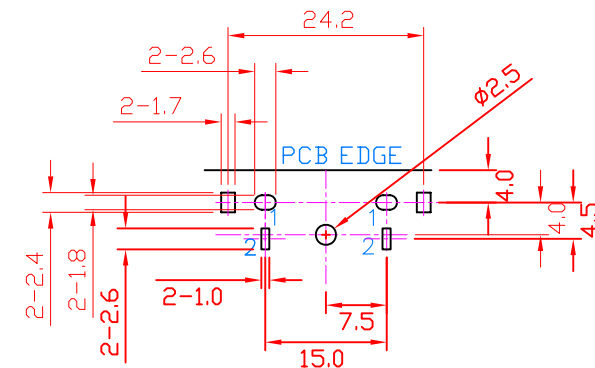

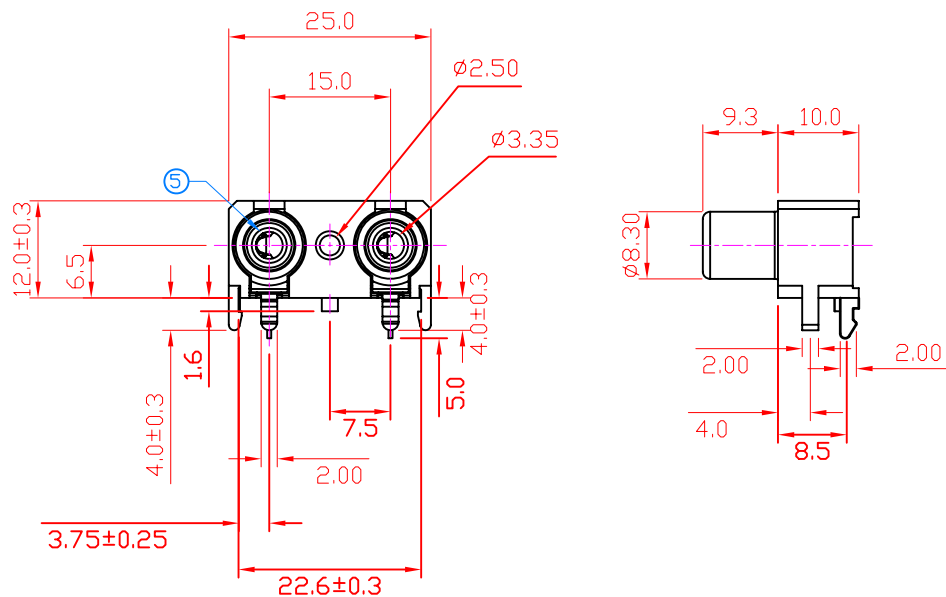
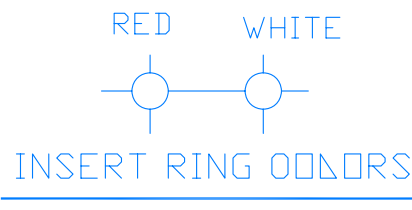




PCB LAYOUT
(BOTTOM VIEW)

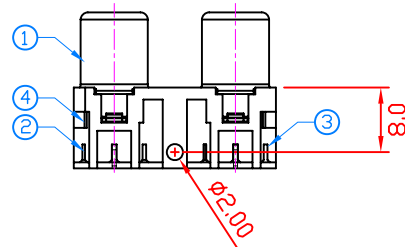

Specification:

Contact Resistance: 30m Ohm. Max. At AC 100mA Max.1KHz
 Insulation Resistance: 100M Ohm Min. At 500V DC.
 Rated Voltage And Current: DC 12V,2A Max ; AC 100V,1A Max.
 Dielectric Withstanding Voltage: 500VAC At 60Hz For 1 Minute
 Durability (Life Test): 4000 Cycles
 Insertion Force: 0.3~3.0 Kg.
 Extraction Force: 0.3~3.0Kg.

NO.	NAME	MATERIAL	FINISH	Q'TY
1	BARREL	BRASS T:0.4	GOLD PLATED	2
2	TERMINAL	BRASS T:0.5	TIN PLATED	2
3	HOUSING	PBT G.F.	YELLOW	1
4	INSERT RING	PBT G.F.	RED,WHITE	2

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.38
 .X ± 0.25
 .XX ± 0.13
 .XXX ± 0.05
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

RCAA2-JR40E1G1RW-02-LF

SERIES JACK DIP 90° EAR 4.0mm
 GOLD
 RED/WHITE
 02 WAY
 LEADFREE

DESCRIPTION: PIN JACK BOARD