
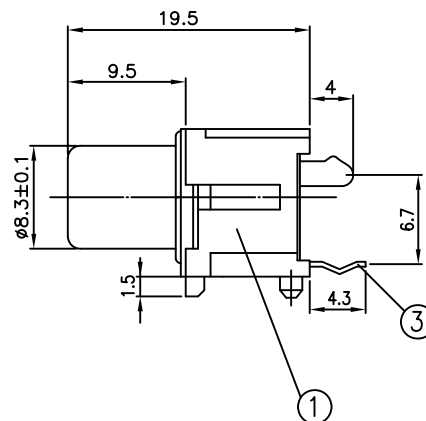
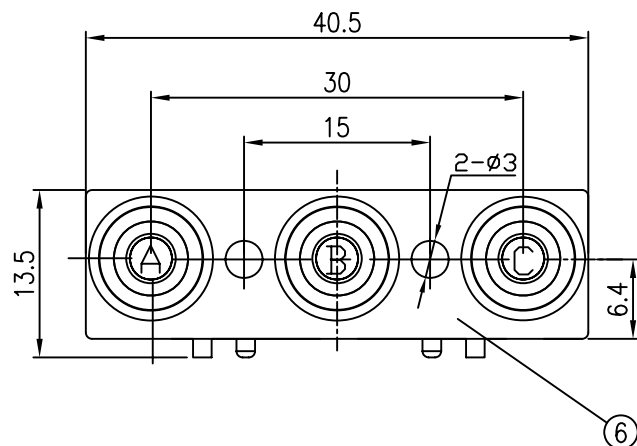



T:1.6 Dimensions of PC board holes

Tolerance : ± 0.1 (Printed-top view)

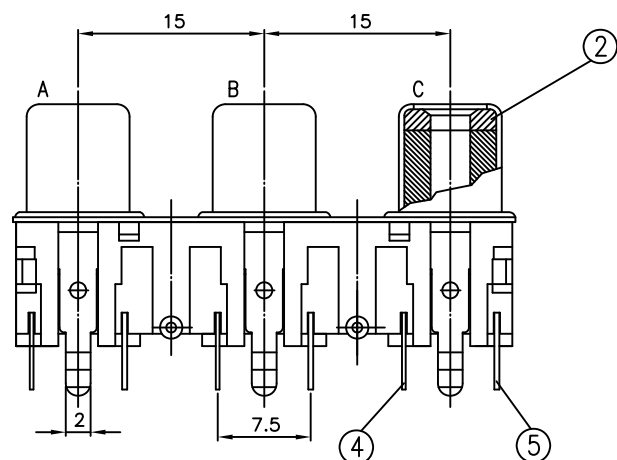

COLOR		
A	B	C

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

6	SEALED PLATE	1	C2680	t=0.3	MB:Cu	Cu/Sn	PLATED
5	SHUNT SPRING	3	C5191	t=0.3	MB:Cu	Ag	PLATED
4	TIP SPRING	3	C2680	t=0.3	MB:Cu	Ag	PLATED
3	OUTER CONTACT	3	C2680	t=0.35	MB:Cu	Cu/Sn	PLATED
2	WASHER	3	PBT 4815		UL-94V0		
1	HOUSING	1	PBT 4815		UL-94V0(BLACK)		
LTR	PART NAME	QTY	MATERIAL		REMARK		

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

RCAA3-JD67E2xxx-02-LF

SERIES

JACK

EAR

DIP 180°

LEADFREE

02 WAY

COLOR ABC

DESCRIPTION: