

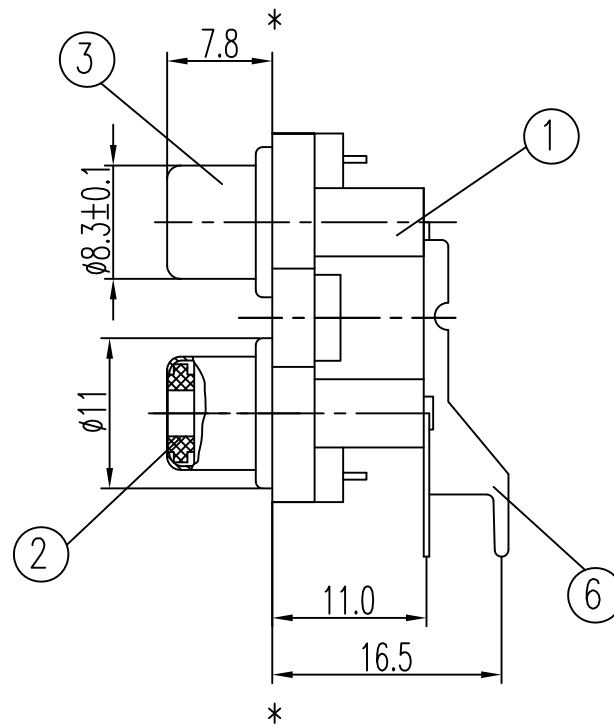


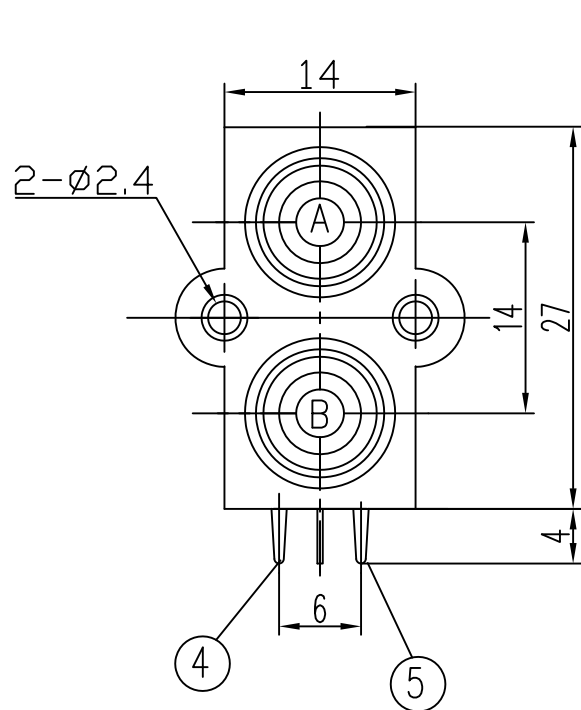

| COLOR | SCHEMATIC |
|-------|-----------|
| A     |           |
|       |           |
| B     |           |
|       |           |



T:1.6 Dimensions of PC board holes

Tolerance :  $\pm 0.1$  (Printed-bottom view)

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL:  $\pm 0.3$

|     |                |     |             |                    |
|-----|----------------|-----|-------------|--------------------|
| 6   | EARTH TERMINAL | 1   | C2680 t=0.5 | MB:Cu Cu/Sn PLATED |
| 5   | TERMINAL       | 1   | C2680 t=0.4 | MB:Cu Cu/Sn PLATED |
| 4   | TERMINAL       | 1   | C2680 t=0.4 | MB:Cu Cu/Sn PLATED |
| 3   | OUTER CONTACT  | 2   | C2680 t=0.4 | MB:Cu Cu/Sn PLATED |
| 2   | WASHER         | 2   | ABS         | UL-94HB            |
| 1   | HOUSING        | 1   | ABS         | UL-94HB            |
| LTR | PART NAME      | QTY | MATERIAL    | REMARK             |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.  $\pm$   
.X  $\pm$   
.XX  $\pm$   
.XXX  $\pm$   
ANG  $\pm$

照片框

ORDER INFORMATION

RCAB1-JR110E2xx-03-LF

SERIES

JACK

DIP 90°

LEADFREE  
03 WAY

A B  
WR: WHITE / RED

EAR

11.00mm

DESCRIPTION: