

T:1.6 Dimensions of PC board holes
Tolerance : ±0.05(Printed-top view)

| | | |
|-----------|---|-------------|
| COLOR | A | WHITE |
| | B | RED |
| SCHEMATIC | A | ○ 2T |
| | B | ○ 1T ○ S |

| | | | | | |
|-----|---------------|-----|----------|--------|----------------|
| 7 | SEALED PLATE | 1 | C2680 | t=0.15 | Cu/Sn PLATED |
| 6 | WASHER | 2 | PBT 4815 | | UL-94V0 |
| 5 | COVER | 1 | ABS | | UL-94HB(BLACK) |
| 4 | HOUSING | 1 | PBT 4815 | | UL-94V0(BLACK) |
| 3 | OUTER CONTACT | 1 | C2680 | t=0.3 | Au PLATED |
| 2 | TERMINAL | 1 | C2680 | t=0.4 | Cu/Sn PLATED |
| 1 | TERMINAL | 1 | C2680 | t=0.4 | Cu/Sn PLATED |
| LTR | PART NAME | QTY | MATERIAL | | REMARK |

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL:±0.3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XX±

DATE

.XXX±

ANG±


SIZE A4

PJECTION

照片框

ORDER INFORMATION

RCAB1-JR54E1G1WR-03-LF

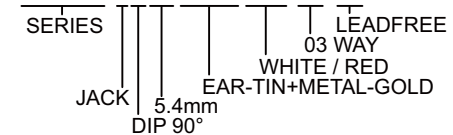

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: PIN JACK