


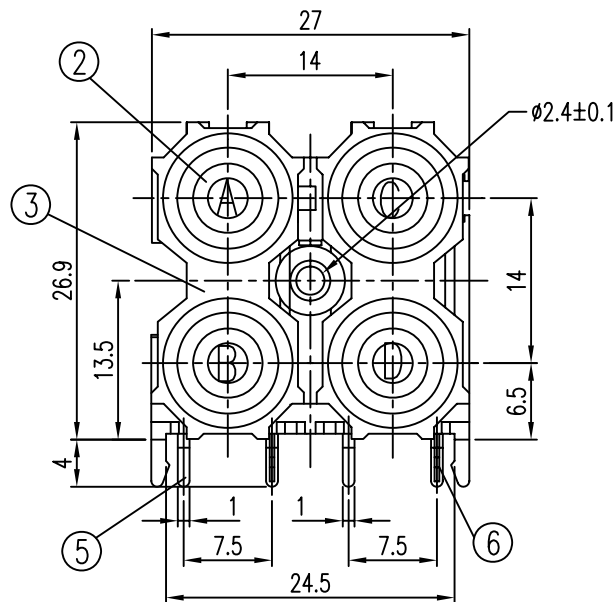


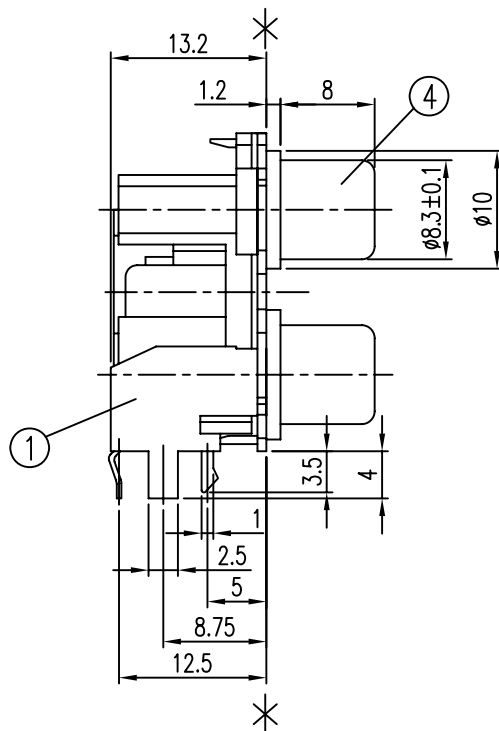

TYPE	A	C
	B	D
COLOR		

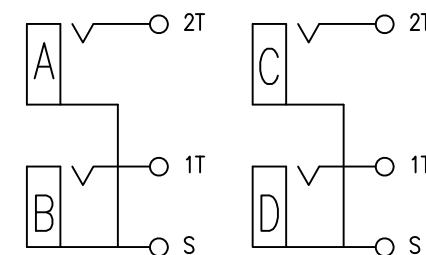

CIRCUIT

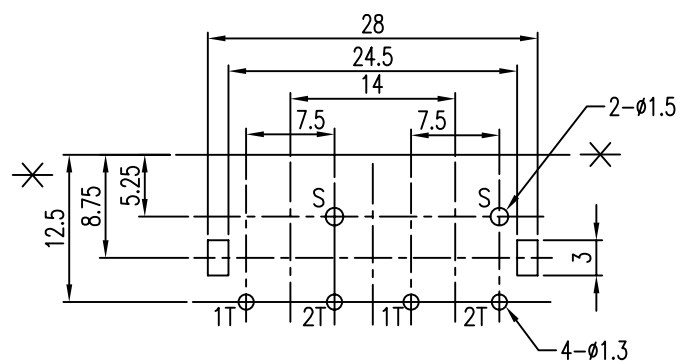

6	TERMINAL	2	QSn6.5-0.1y t=0.4	MB: Cu Pb/Sn PLATED
5	TERMINAL	2	QSn6.5-0.1y t=0.4	MB: Cu Pb/Sn PLATED
4	OUTER CONTACT	2	H65 t=0.4	MB: Cu Ni PLATED
3	COVER	2	ABS	UL-94HB
2	WASHER	4	ABS	UL-94HB
1	HOUSING	1	ABS	UL-94HB
LTR	PART NAME	QTY	MATERIAL	REMARK

T:1.6 Dimensions of PC board holes
Tolerance : ±0.1(Printed-bottom view)

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

RCAB2-JR52E1xxxx-03-LF

SERIES

JACK

DIP 90°

5.25mm

EAR

LEADFREE

CD 03 WAY

WY: WHITE / YELLOW

AB :

RO: RED / ORANGE

DESCRIPTION: PIN JACK