



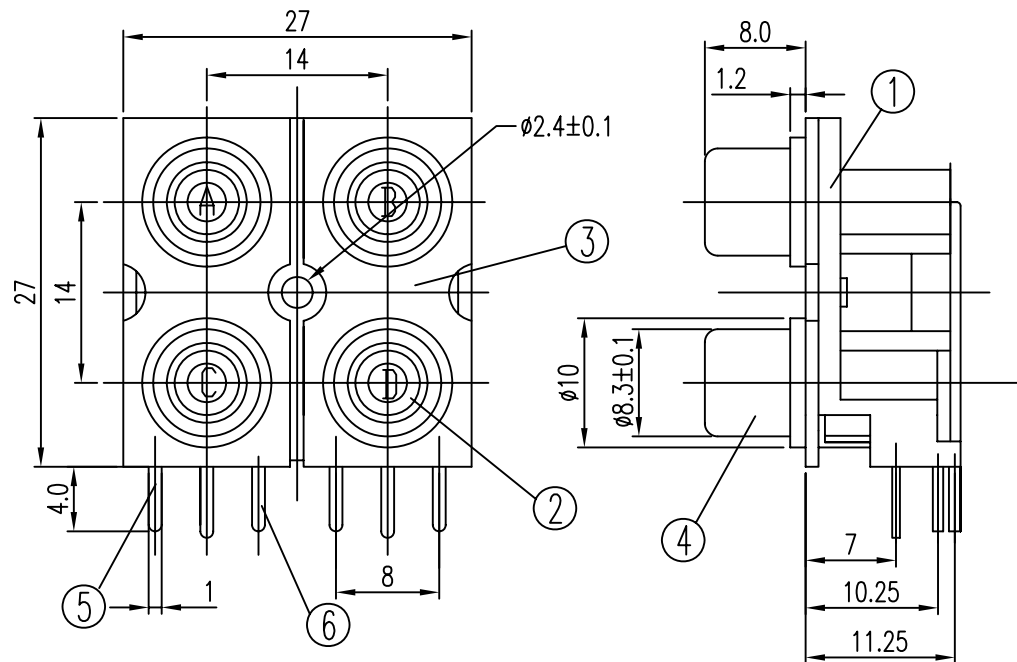

	A	B
	C	D
TYPE COLOR	WHITE	WHITE
	RED	RED
SCHEMATIC		
A	3	3
B	2	2
C	1	1
D	3	3
	2	2
	1	1

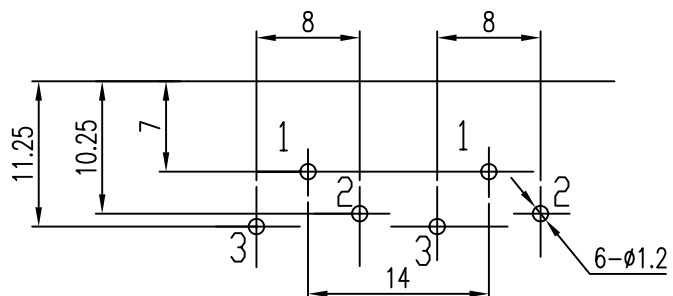

T:1.6 Dimensions of PC board holes

Tolerance : ± 0.05 (Printed-top view)

6	TERMINAL	2	C2680	t=0.5	Cu/Sn PLATED
5	TERMINAL	2	C2680	t=0.5	Cu/Sn PLATED
4	OUTER CONTACT	2	C2680	t=0.3	Au PLATED
3	COVER	2	ABS		UL-94HB(BLACK)
2	WASHER	4	PBT 4815		UL-94V0
1	HOUSING	1	PBT 4815		UL-94V0(BLACK)
LTR	PART NAME	QTY	MATERIAL	REMARK	

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

照片框

ORDER INFORMATION

RCAB2-JR70E1G1WWRR14-03-LF

SERIES JACK DIP 90° 7.0mm EAR GOLD AB: WHITE, WHITE + CD: RED, RED LEADFREE 03 WAY 14mm

DESCRIPTION: PIN JACK