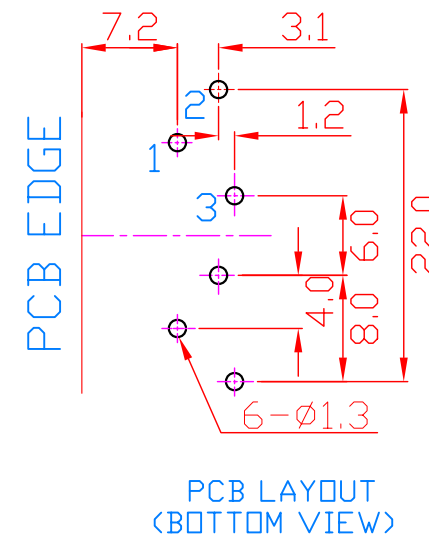
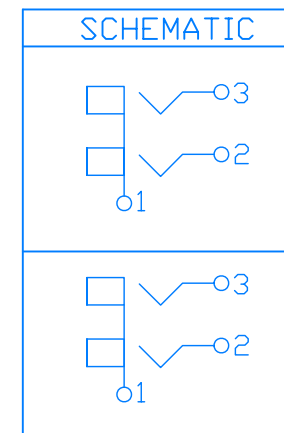
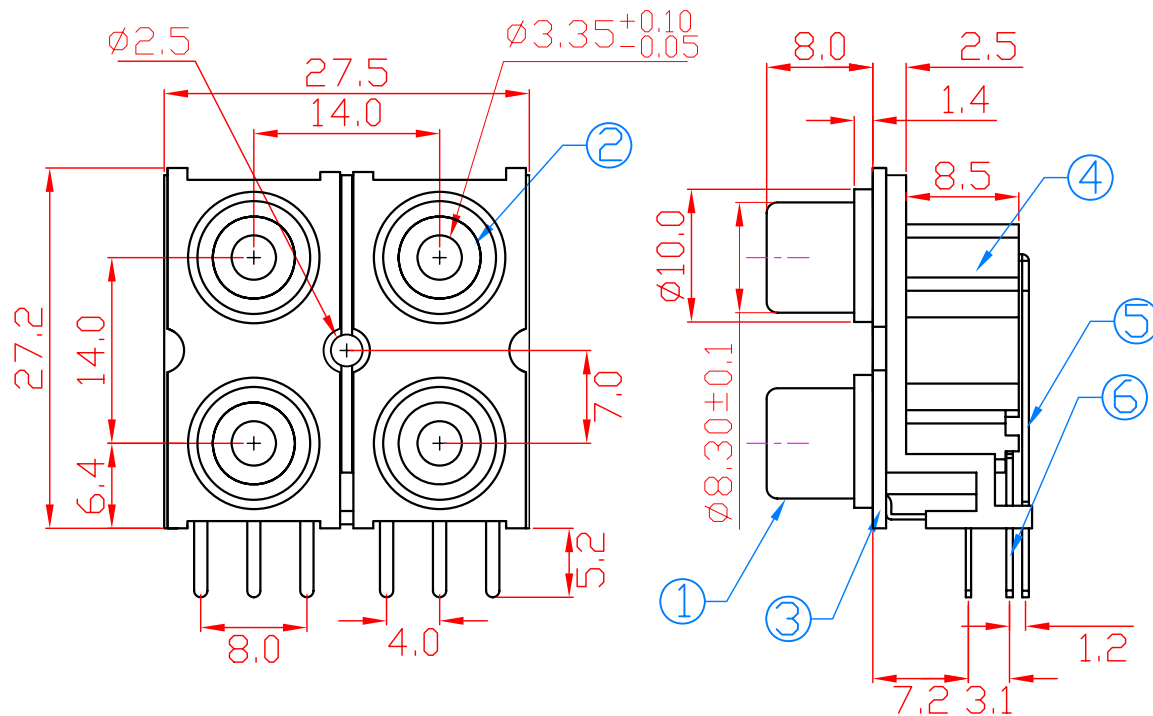


### Specification:

Contact Resistance: 30m Ohm. Max. At AC 100mA Max. 1KHz.  
 Insulation Resistance: 100M Ohm Min. At 500V DC.  
 Rated Voltage And Current: DC 12V, 2A Max ; AC 100V, 1A Max.  
 Dielectric Withstanding Voltage: 500VAC At 60Hz For 1 Minute.  
 Durability (Life Test): 4000 Cycles.  
 Insertion Force: 0.3~3.0 Kg.  
 Extraction Force: 0.3~3.0 Kg.

| MO. | NAME        | MATERIAL    | FINISH      | Q'TY |
|-----|-------------|-------------|-------------|------|
| 1   | BARREL      | BRASS T:0.4 | GOLD PLATED | 2    |
| 2   | INSERT RING | PBT G.F.    | WHITE, RED  | 4    |
| 3   | COVER       | ABS         | BLACK       | 2    |
| 4   | HOUSING     | ABS         | RED         | 1    |
| 5   | TERM.       | BRASS T:0.5 | TIN PLATED  | 2    |
| 6   | TERM.       | BRASS T:0.5 | TIN PLATED  | 2    |

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X.  $\pm 0.38$

CHECKED BY GENIUS

.X  $\pm 0.25$

UNIT / mm

SCALE 1 : 1

.XXX  $\pm 0.13$

DATE

ANG  $\pm$

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

RCAB2-JR72E1G1WWRR14-03-LF

SERIES JACK DIP 90° 7.2mm EAR GOLD AB: WHITE, WHITE + CD: RED, RED LEADFREE 03 WAY 14mm

DESCRIPTION:

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com