



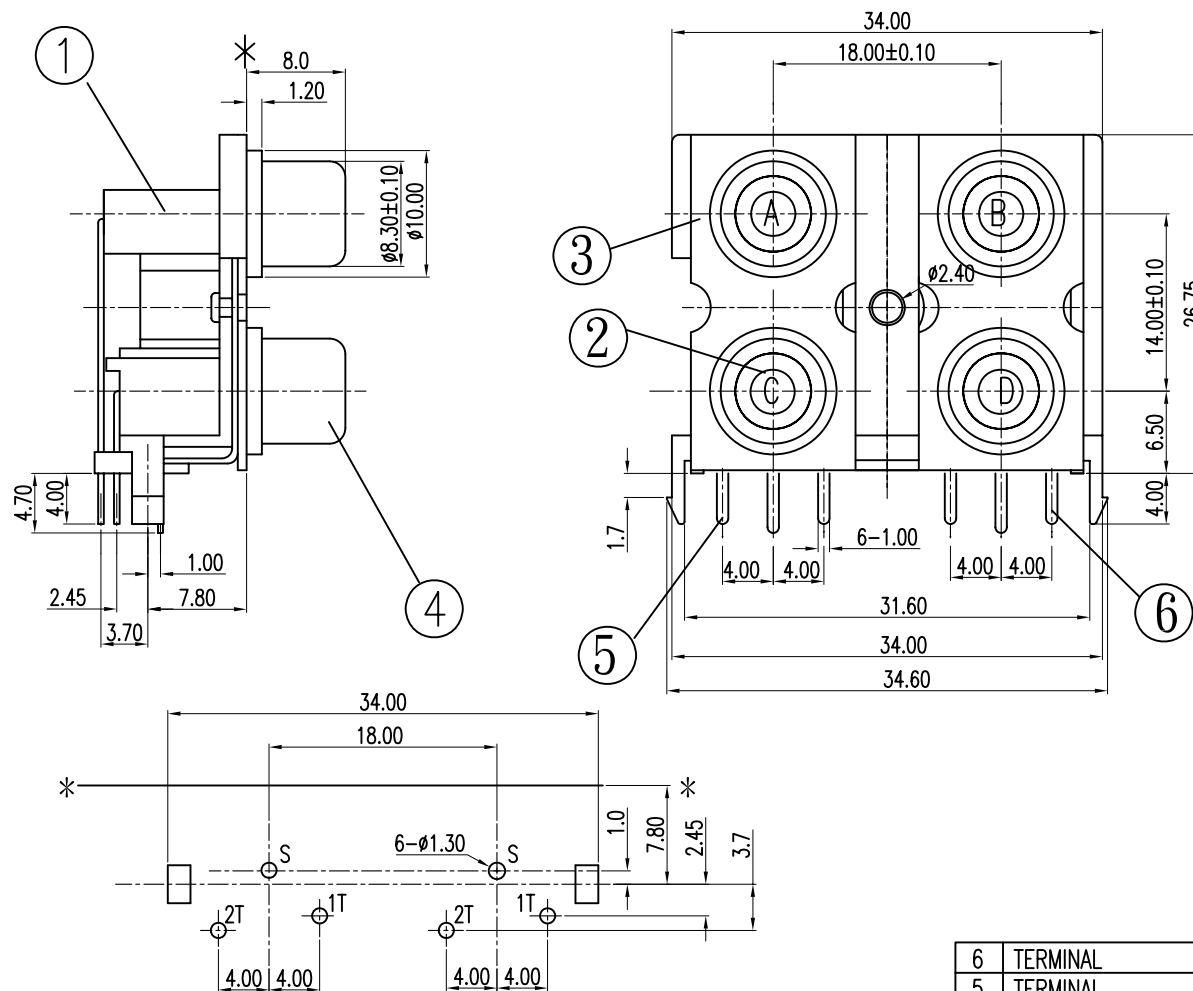

COLOR	WHITE	RED
	WHITE	RED
TYPE	A	B
	C	D



T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-bottom view)

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

6	TERMINAL	2	C2680	t=0.5	Cu/Sn PLATED
5	TERMINAL	2	C2680	t=0.5	Cu/Sn PLATED
4	OUTER CONTACT	2	C2680	t=0.3	Au PLATED
3	COVER	2	ABS		UL-94HB
2	WASHER	4	PBT 4815		UL-94HB
1	HOUSING	1	PBT 4815		UL-94V0(BLACK)
LTR	PART NAME	QTY	MATERIAL		REMARK

照片框

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
X, $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

ORDER INFORMATION

RCAB2-JR78E1WRWR18-03-LF

SERIES

JACK

7.8mm

DIP 90°

EAR

AB: WHITE, RED + CD: WHITE, RED

18mm

03 WAY

LEADFREE

DESCRIPTION: PIN JACK