



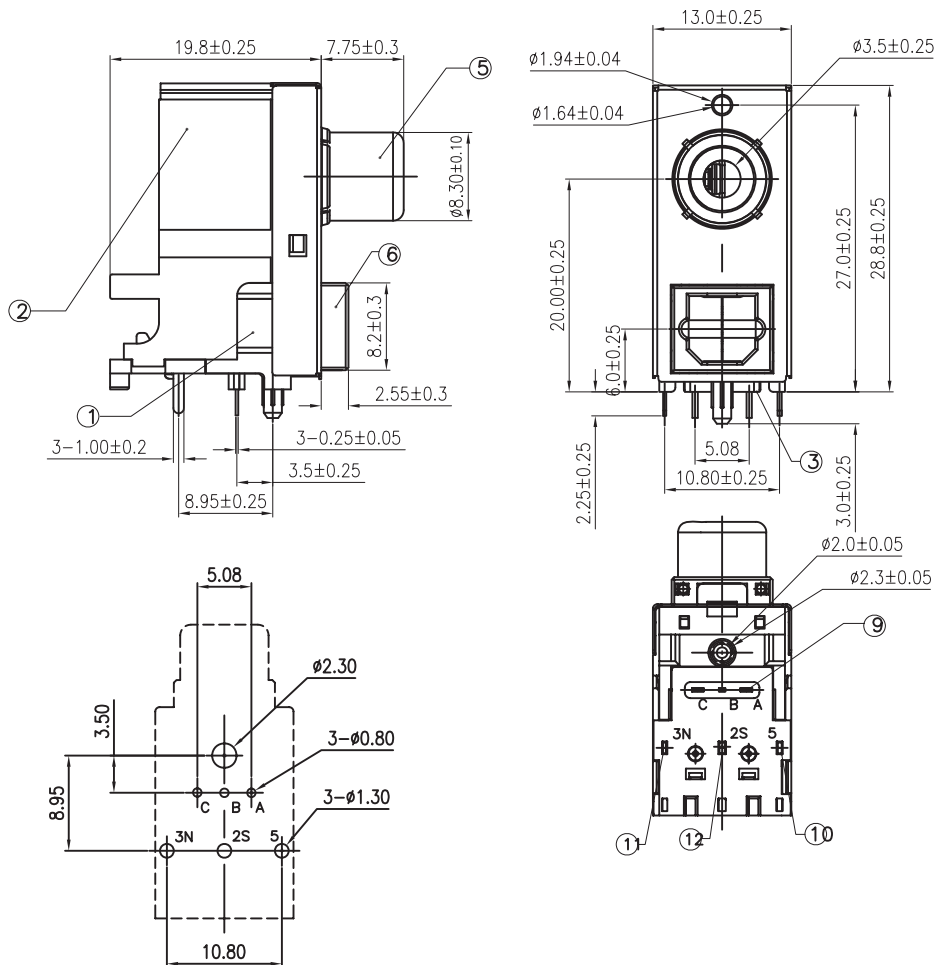

Recommended PCB Layout
<BOTTOM VIEW>


* TOLERANCE FOR PCB LAYOUT IS ± 0.05

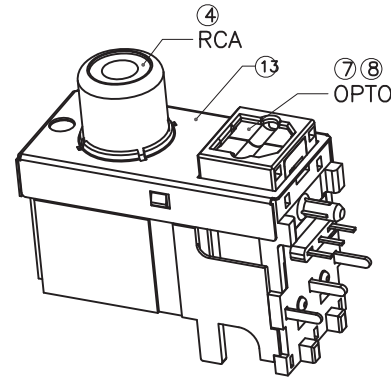

SPECIFICATION :

- 1.CURRENT RATING:0.3 AMP. MAX.
- 2.CONTACT RESISTANCE : 50 MΩ MAX.
- 3.INSULATION RESISTANCE :100MΩ MIN. AT 500V DC.
- 4.DIELECTRIC WITHSTANDING : 500V AC R.M.S. FOR PER MINUTE.
- 5.OPERATING TEMPERATURE : -25°C TO $+85^{\circ}\text{C}$.
- 6.DURABILITY: 500 CYCLES.
- 7.MATING FORCE:3.0Kg MAX.
UNMATING FORCE:0.4~3.0Kg.
- 8.RESISTANCE TO SOLDERING HEAT:260 $^{\circ}\text{C}$ FOR 5SECONDS,
AND ONLY FOR WAVE SOLDERING.

13	SHIELD	1	BRASS	Ni 50u"MIN
12	CONTACT 2S-RCA	1	BRASS	TIN100U"MIN,OVER Ni50U"MIN
11	CONTACT 3N-RCA	1	PHOSPHOR BRONZE	TIN100U"MIN,OVER Ni50U"MIN
10	CONTACT 5-RCA	1	BRASS	TIN100U"MIN,OVER Ni50U"MIN
9	DRIVE IC	1	PBS	TIN100U"MIN,OVER Ni50U"MIN
8	SPRING	1	SUS301	
7	GATE (OPTO)	1	PA66	UL-94V0(BLACK)
6	FRAME (OPTO)	2	PA66	UL-94V0(BLACK)
5	BUSHING (RCA)	1	BRASS	Ni 50u"MIN
4	WASHER	1	PBT	UL-94V0(BLACK)
3	COVER	1	PA9T	UL-94V0(BLACK)
2	HOUSING-RAC	1	PBT	UL-94V0(BLACK)
1	HOUSING-OPTO	1	LCP	UL-94V0(BLACK)
LTR	PART NAME	QTY	MATERIAL	REMARK



XX	WASHER COLOR	YY	OPTO GATE COLOR
OR	ORANGE(157C)	GR	LIME(577C)
BK	BLACK	GR	LIME(577C)
YL	YELLOW	GR	LIME(577C)
YL	YELLOW	BK	BLACK
OR	ORANGE(157C)	BK	BLACK
RD	RED	GR	LIME(577C)

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE


SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

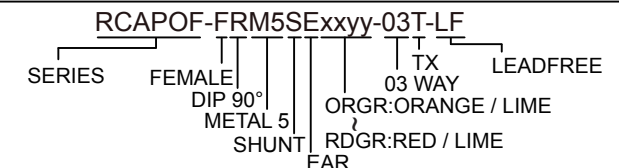

DESCRIPTION: AUDIO JACK+OPTO